

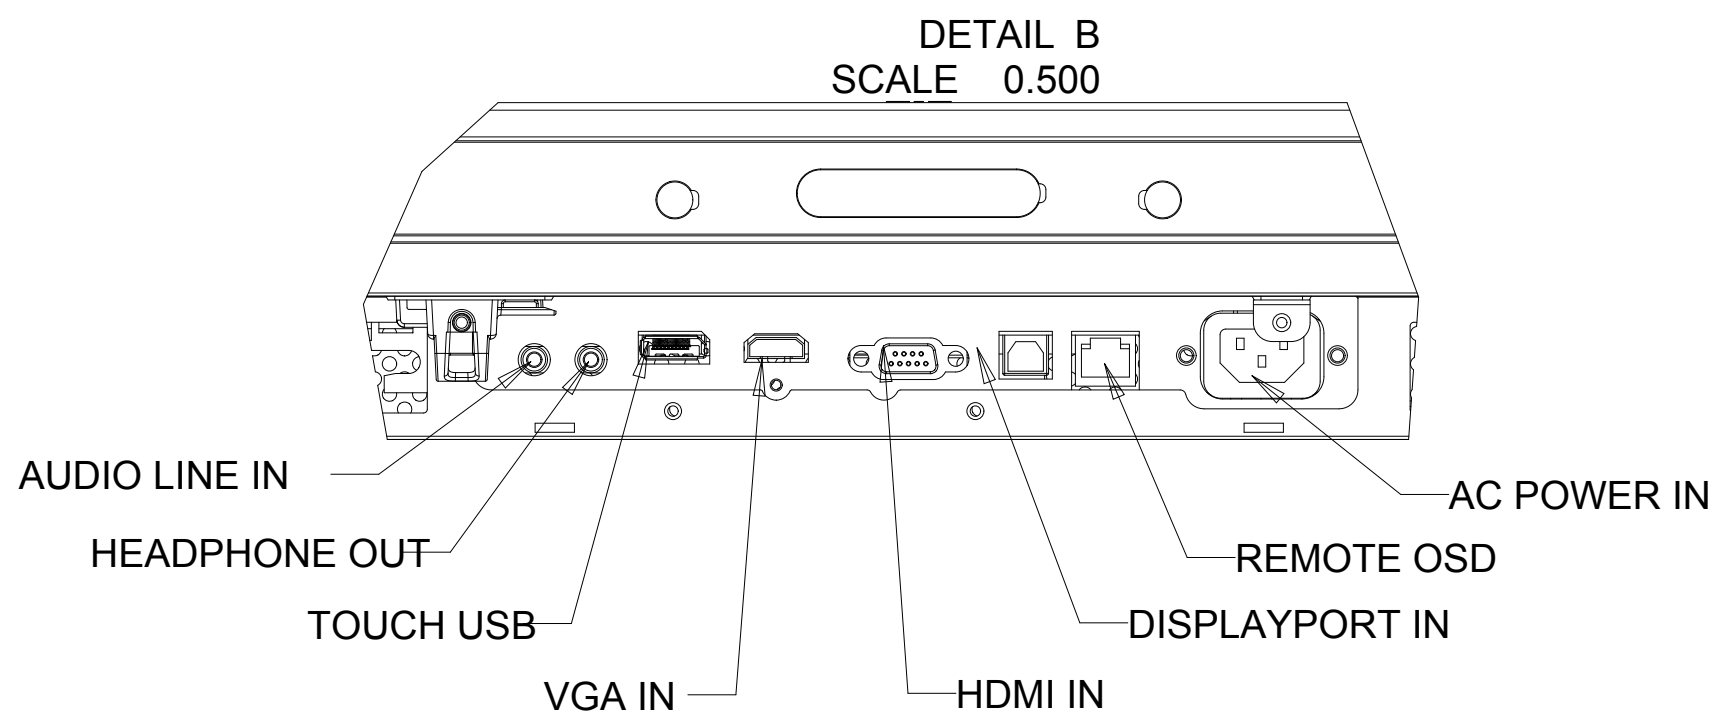
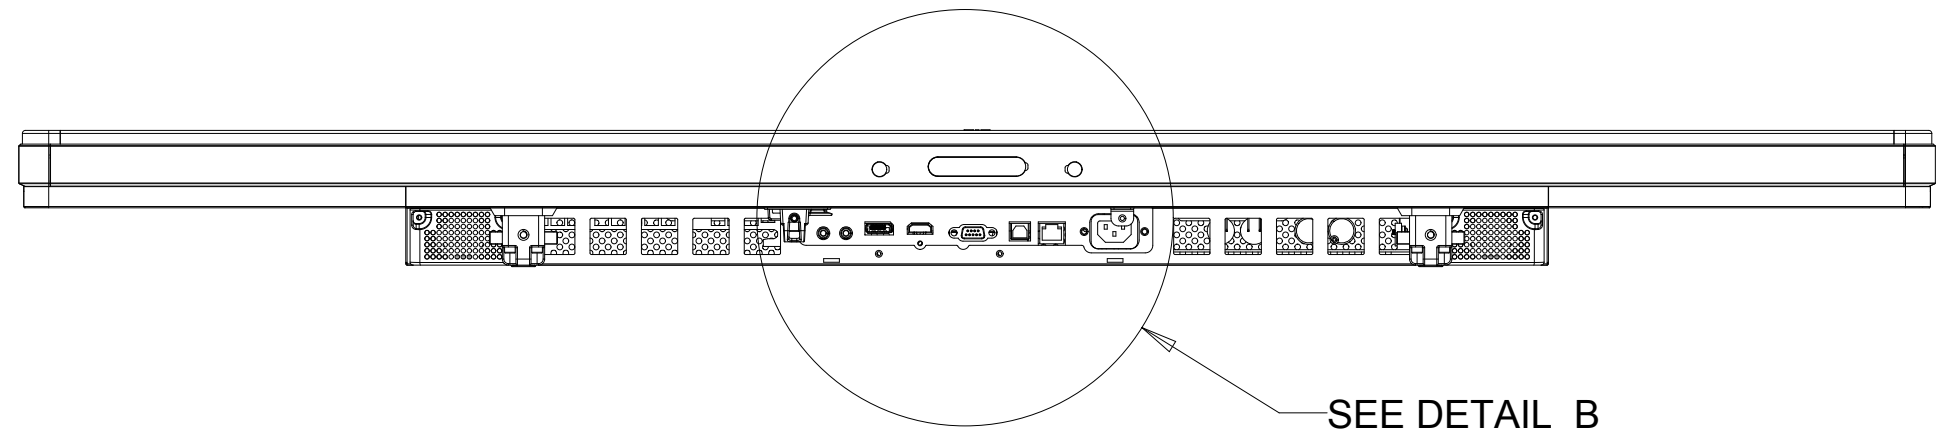
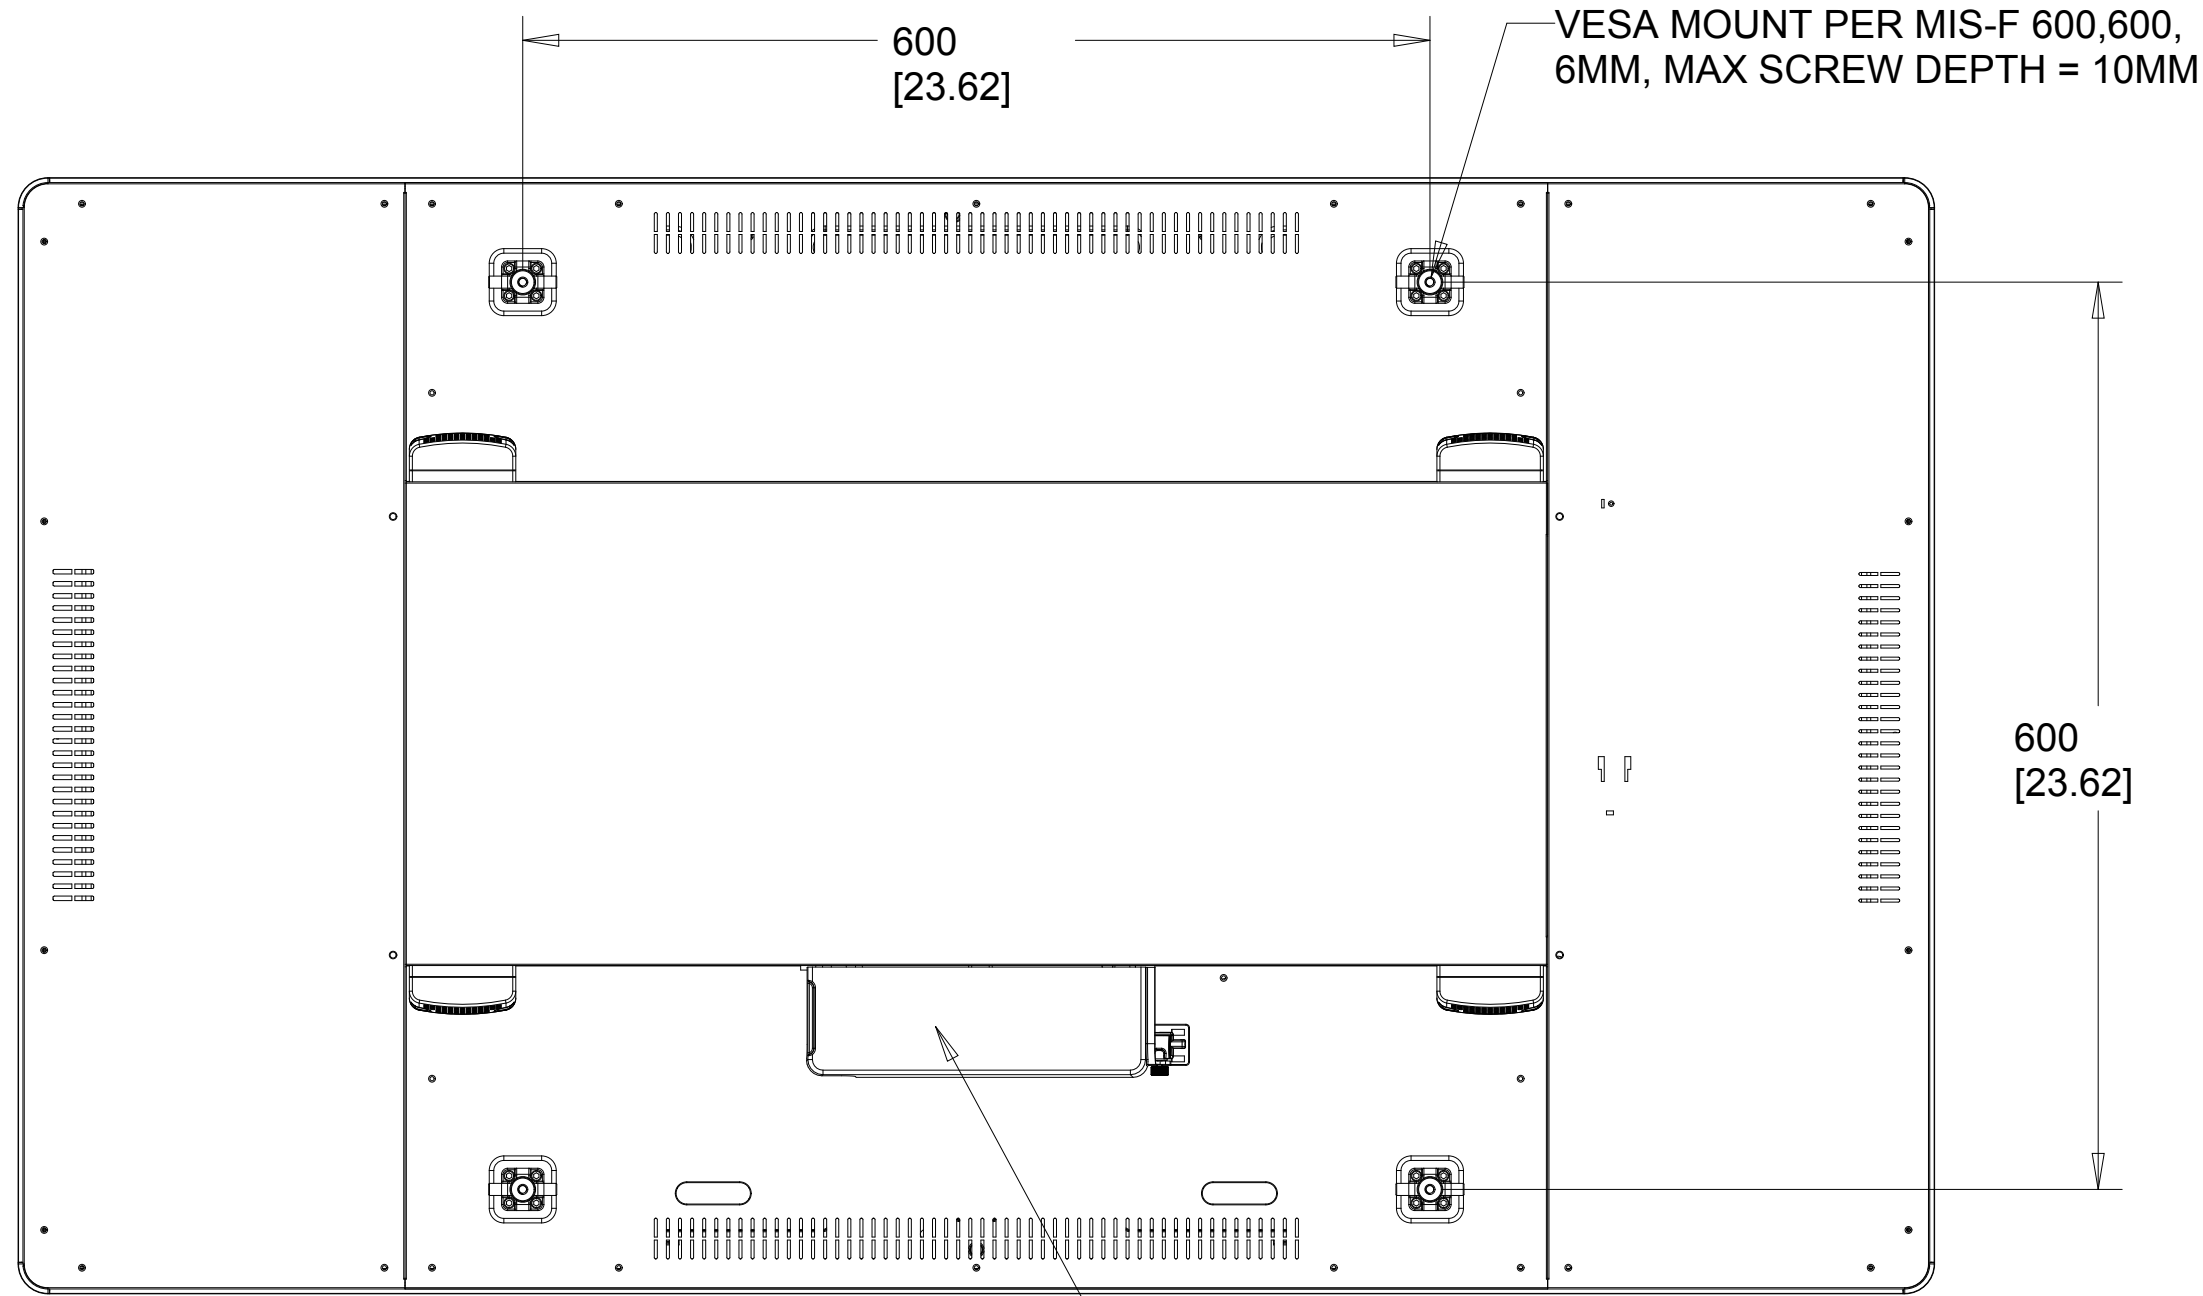
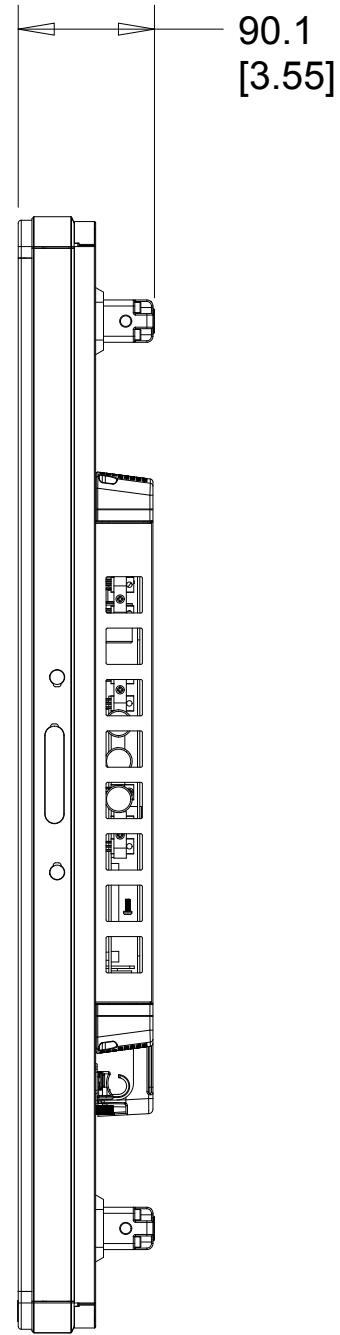



DIMENSIONAL DRAWING: ET5551L

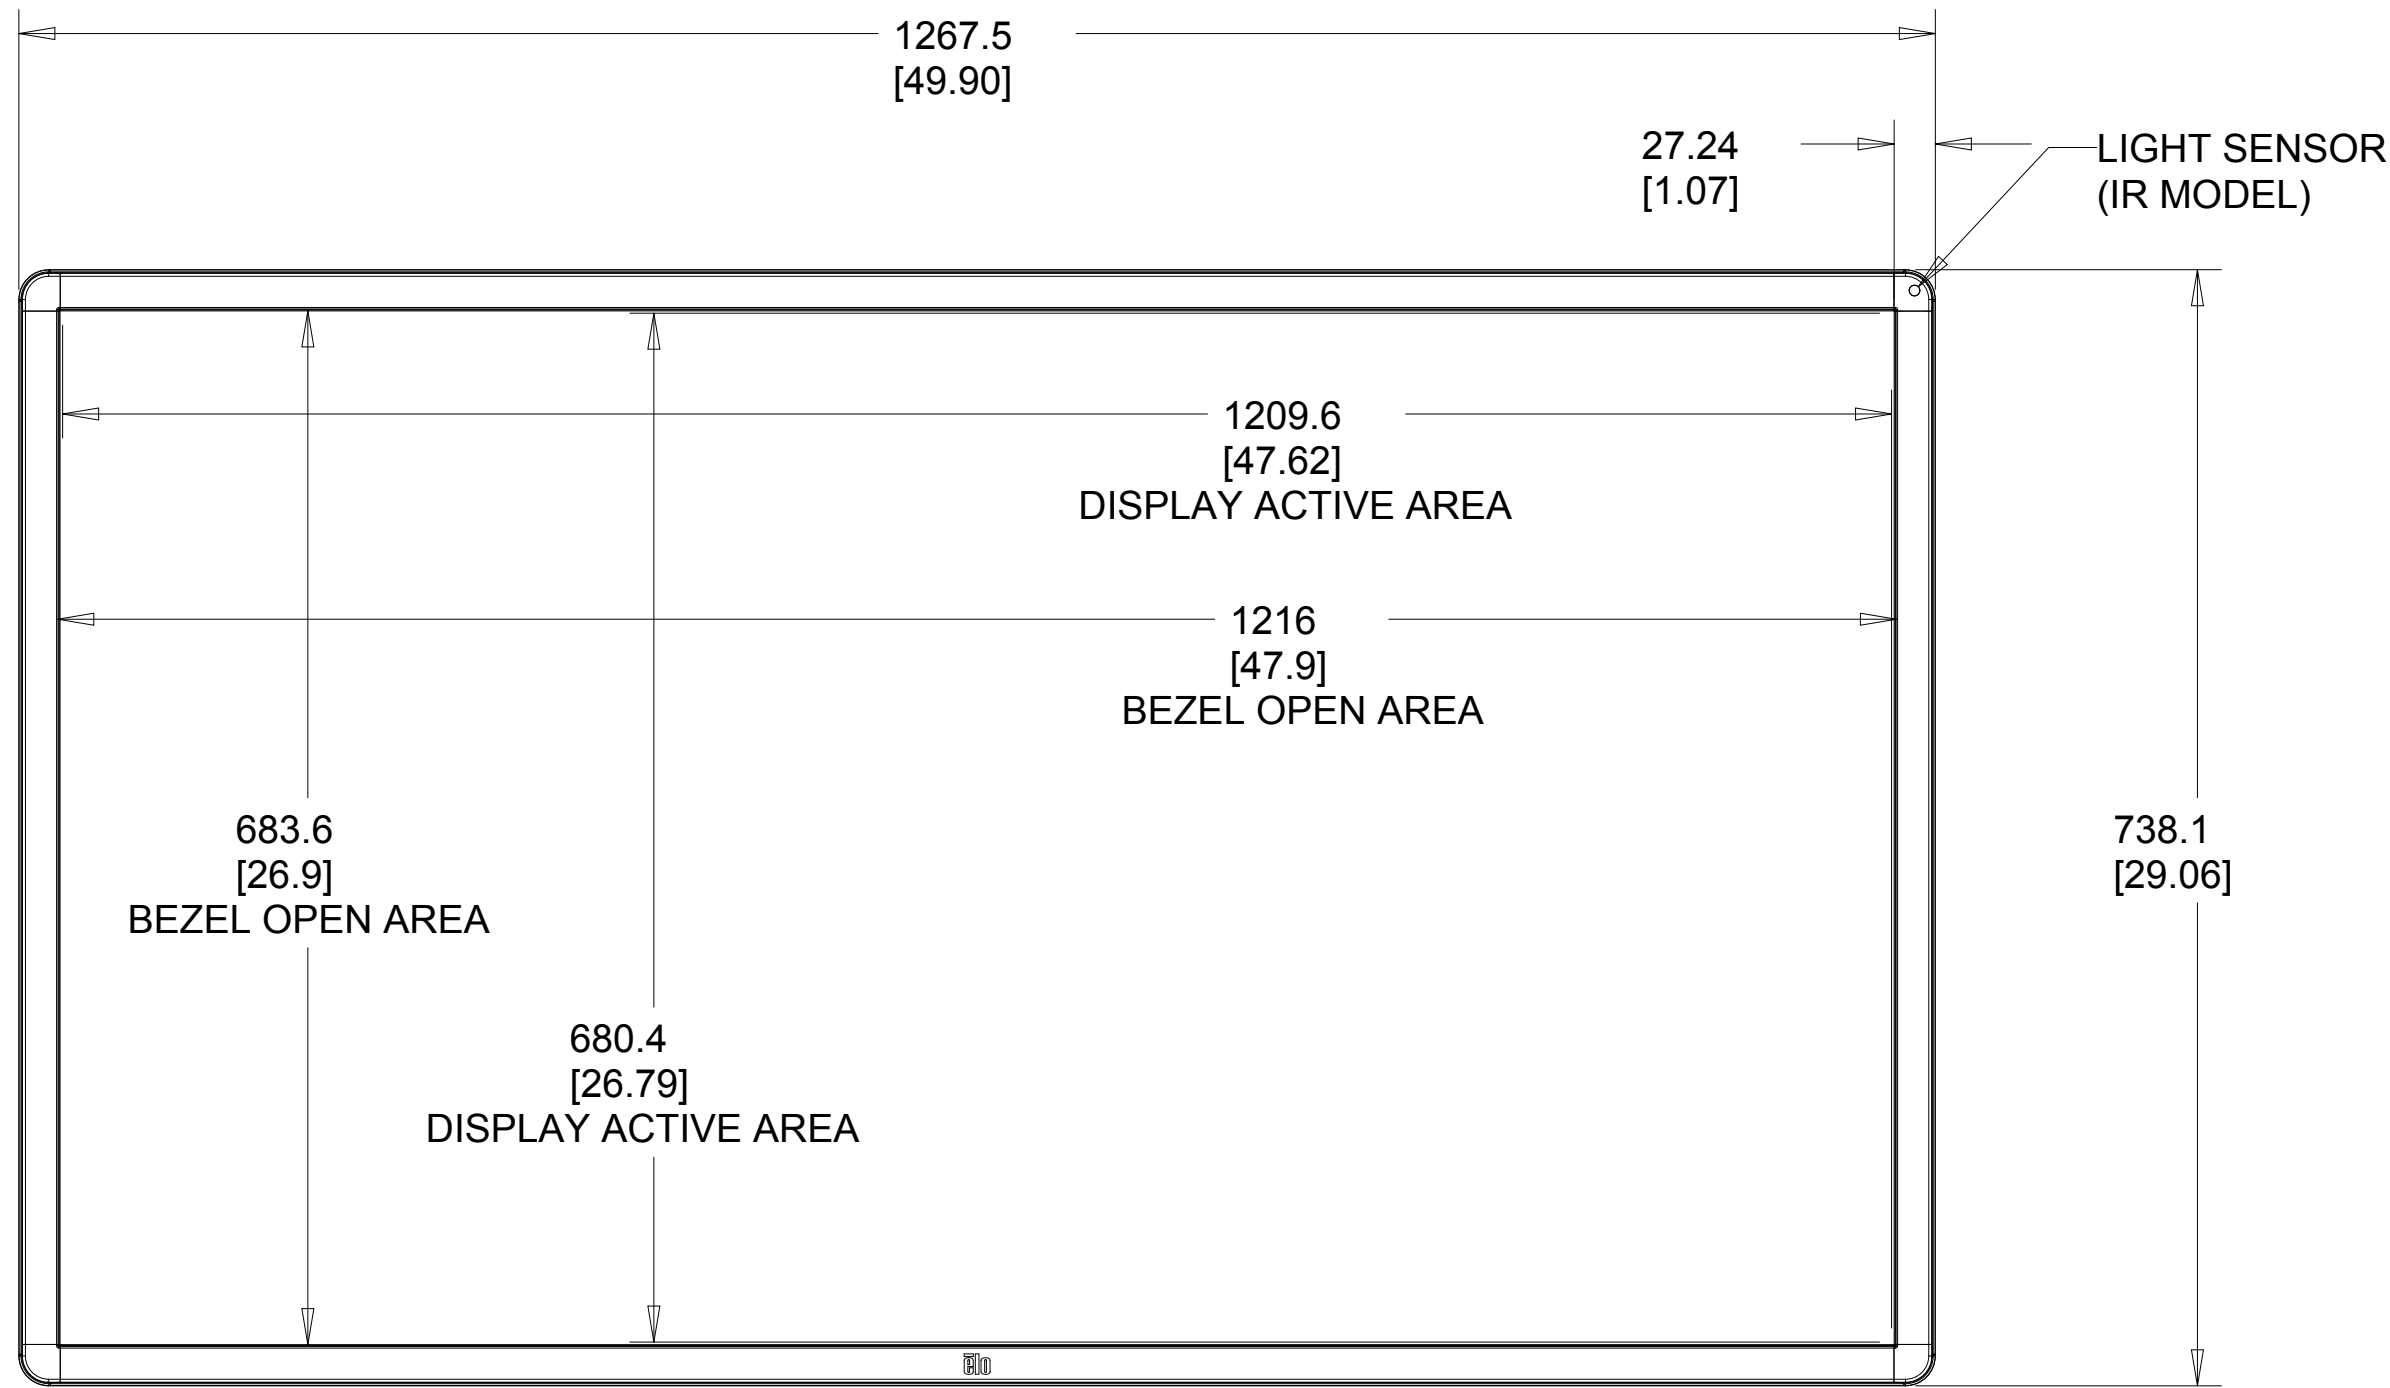

REMOTE OSD (1 INCLUDED WITH TOUCHMONITOR)
P/N E483757

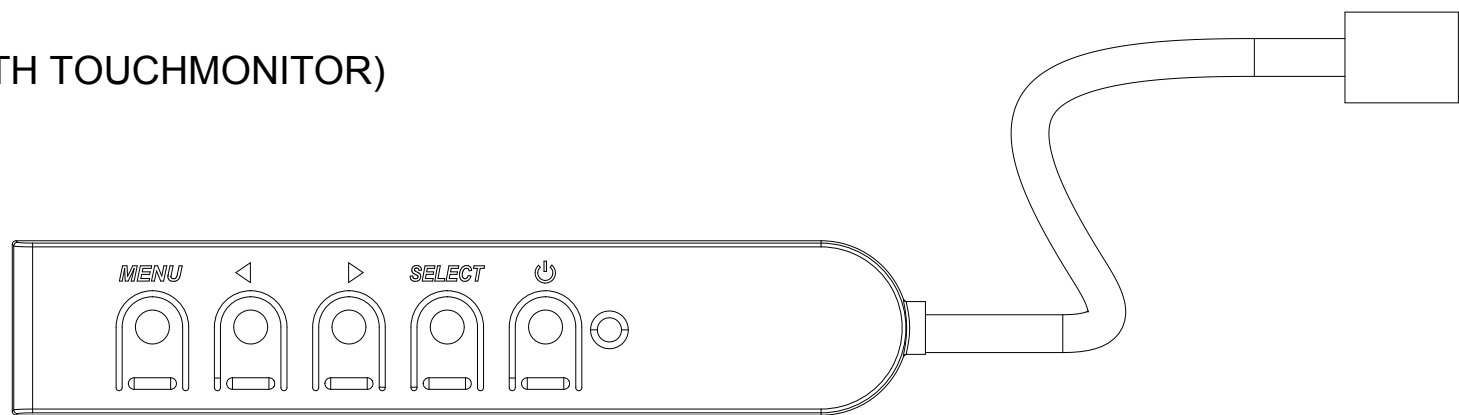


DIMENSIONS ARE IN MILLIMETERS [INCHES]

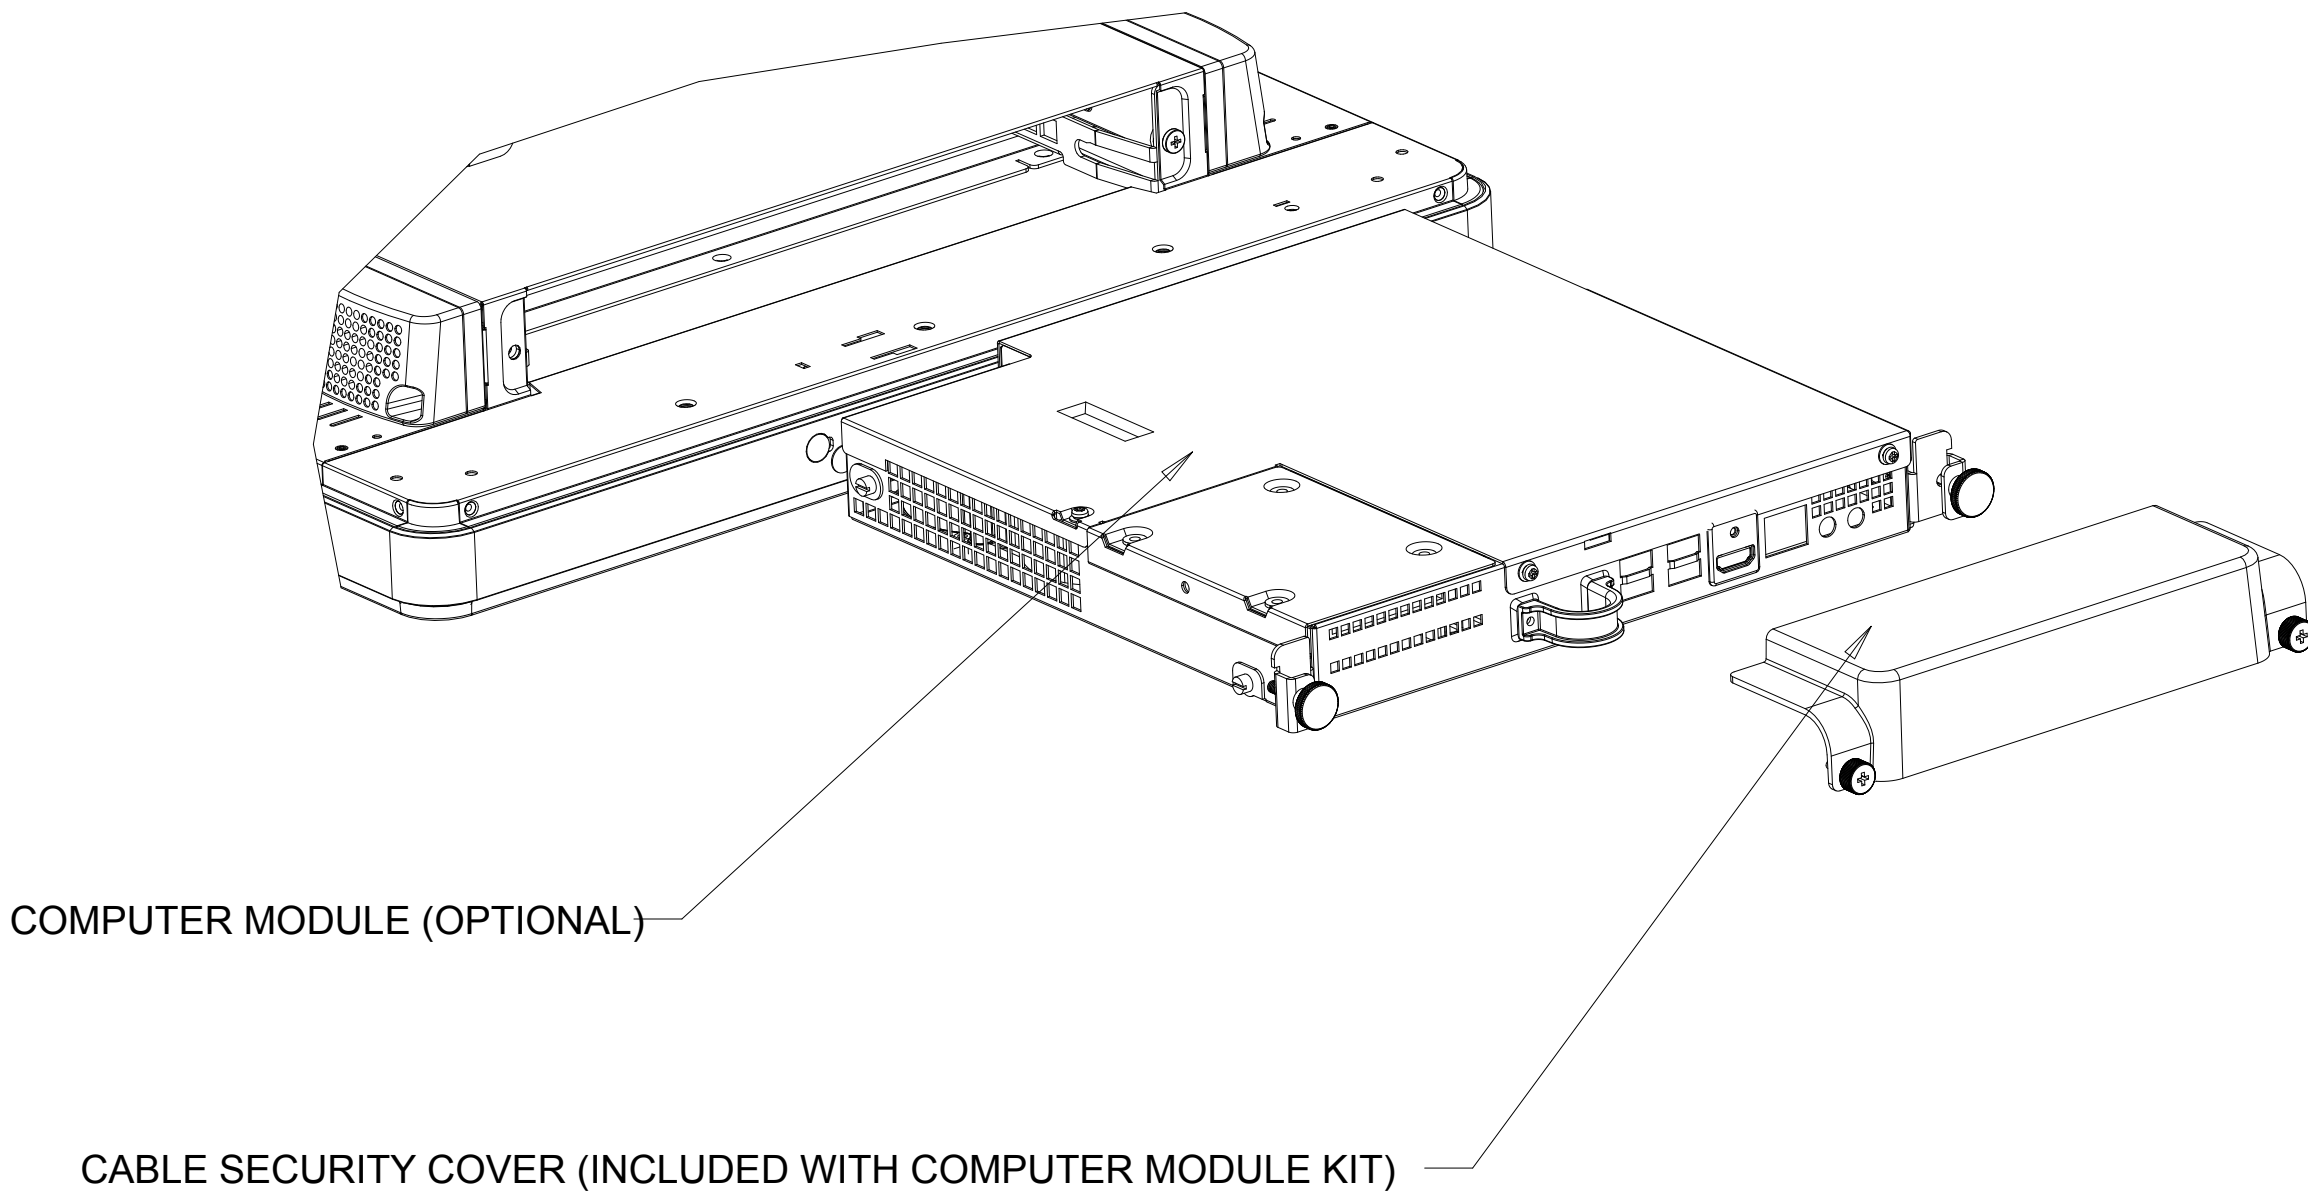

elo

MS601862
DATE: 08/04/2016
REV: A


MOUNTING INTERFACE FOR PERIPHERALS
ONE PER SIDE (FOUR TOTAL)

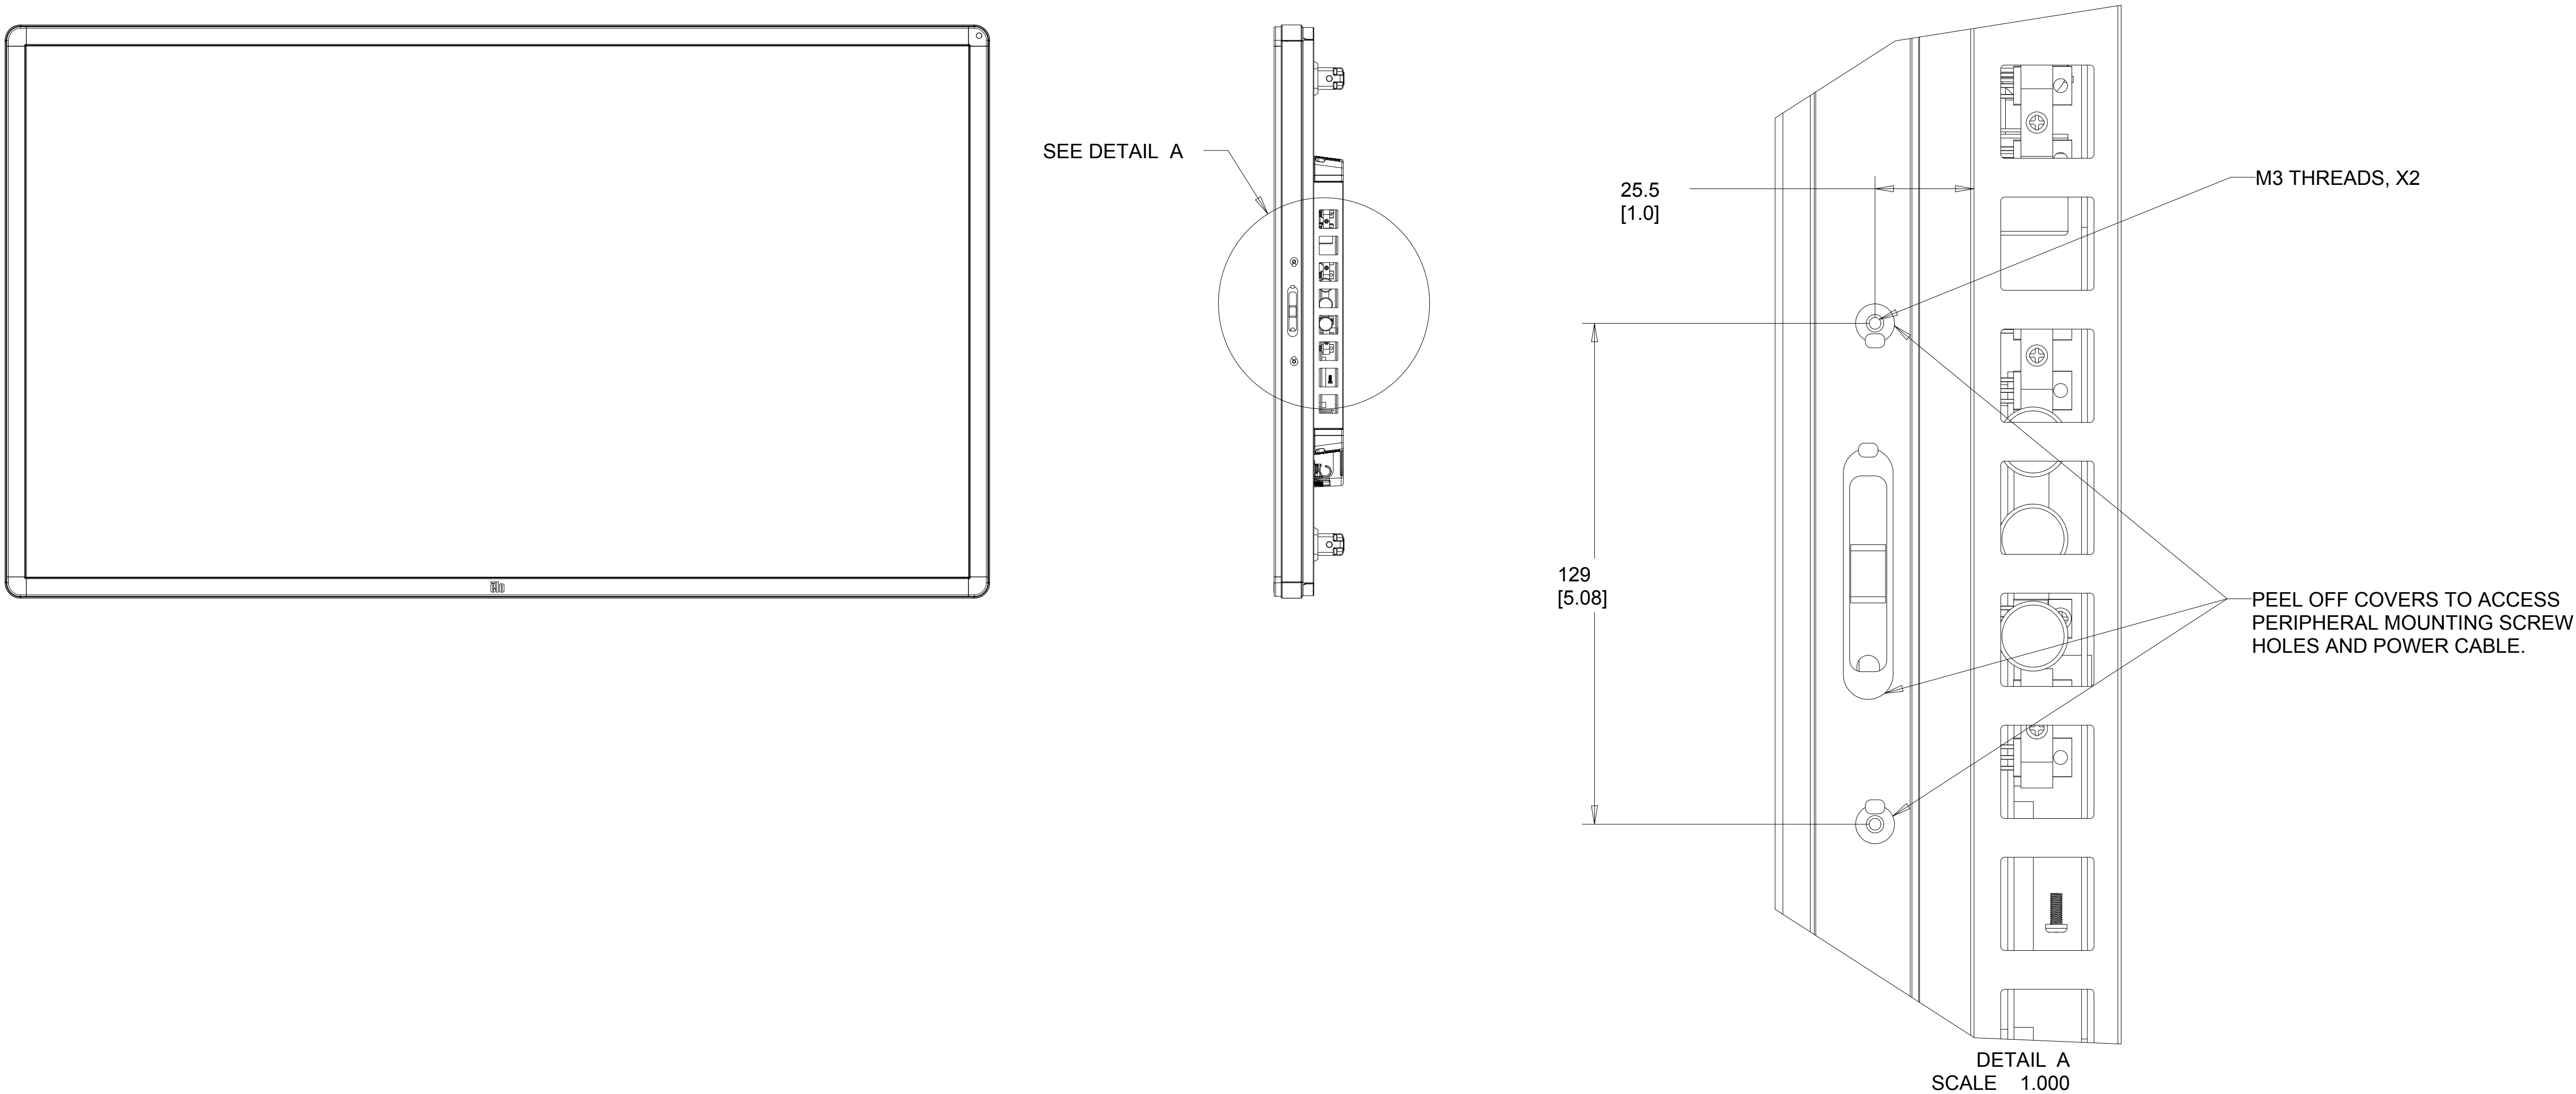

THERMAL RECOMMENDATIONS
PORTRAIT AND LANDSCAPE ORIENTATION



WALL MOUNTING

MAINTAIN AMBIENT ROOM TEMPERATURE
BELOW 40C

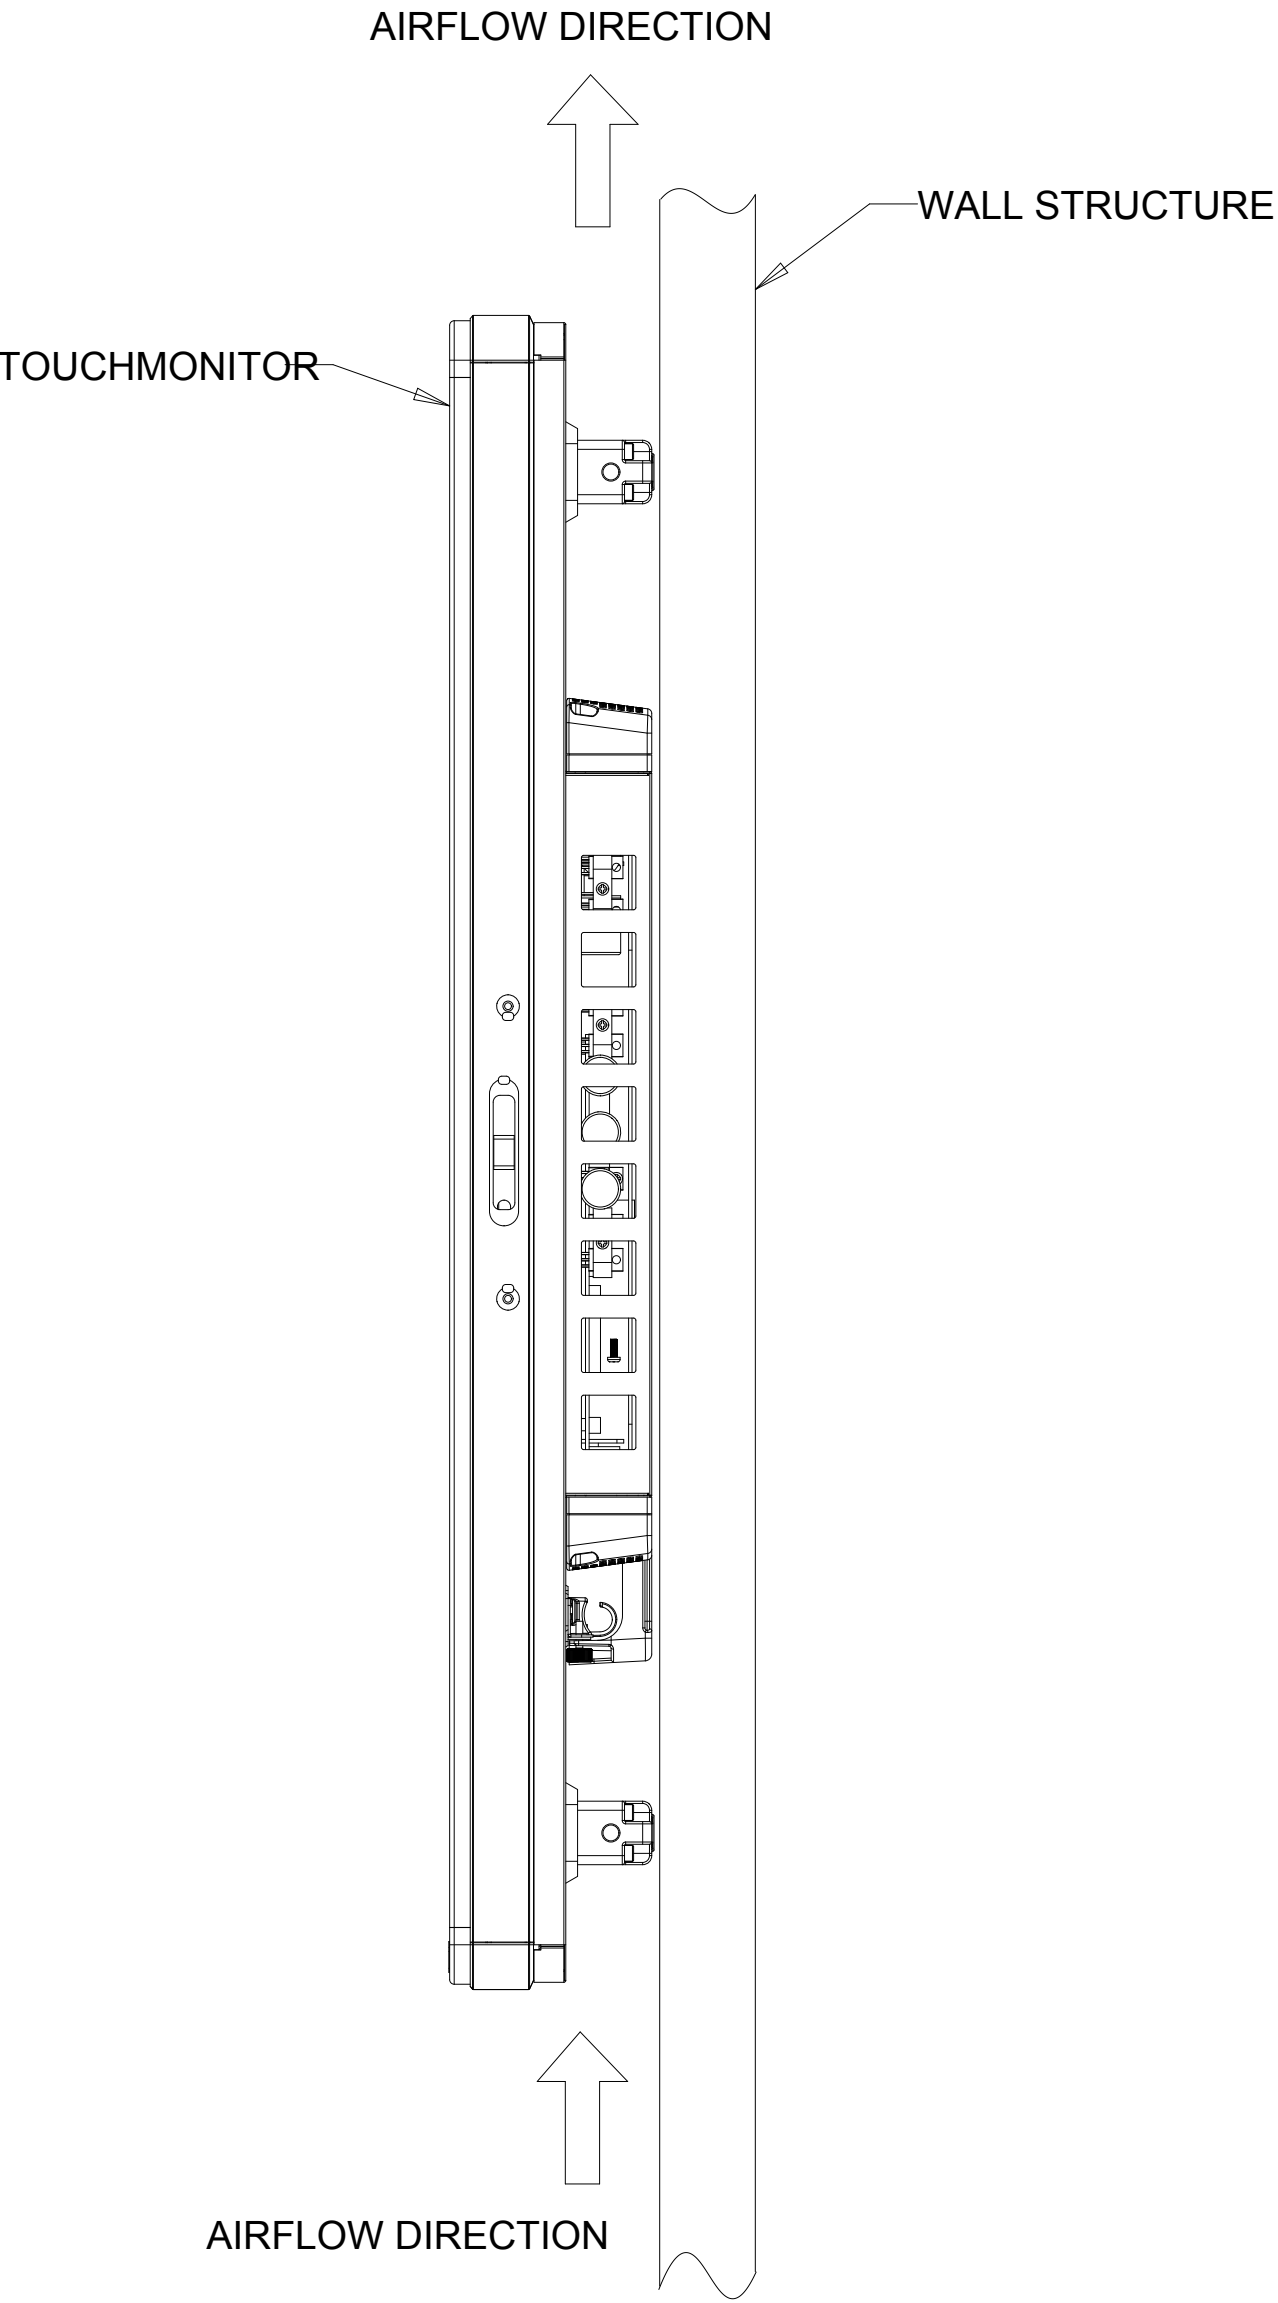


FLUSH MOUNTING

AIR BEHIND MONITOR MUST NEVER EXCEED
40C DURING OPERATION. INSTALL VENTING
AND/OR FANS IN WALL STRUCTURE TO CIRCULATE
AIR AND MAINTAIN SAFE OPERATING TEMPERATURE.

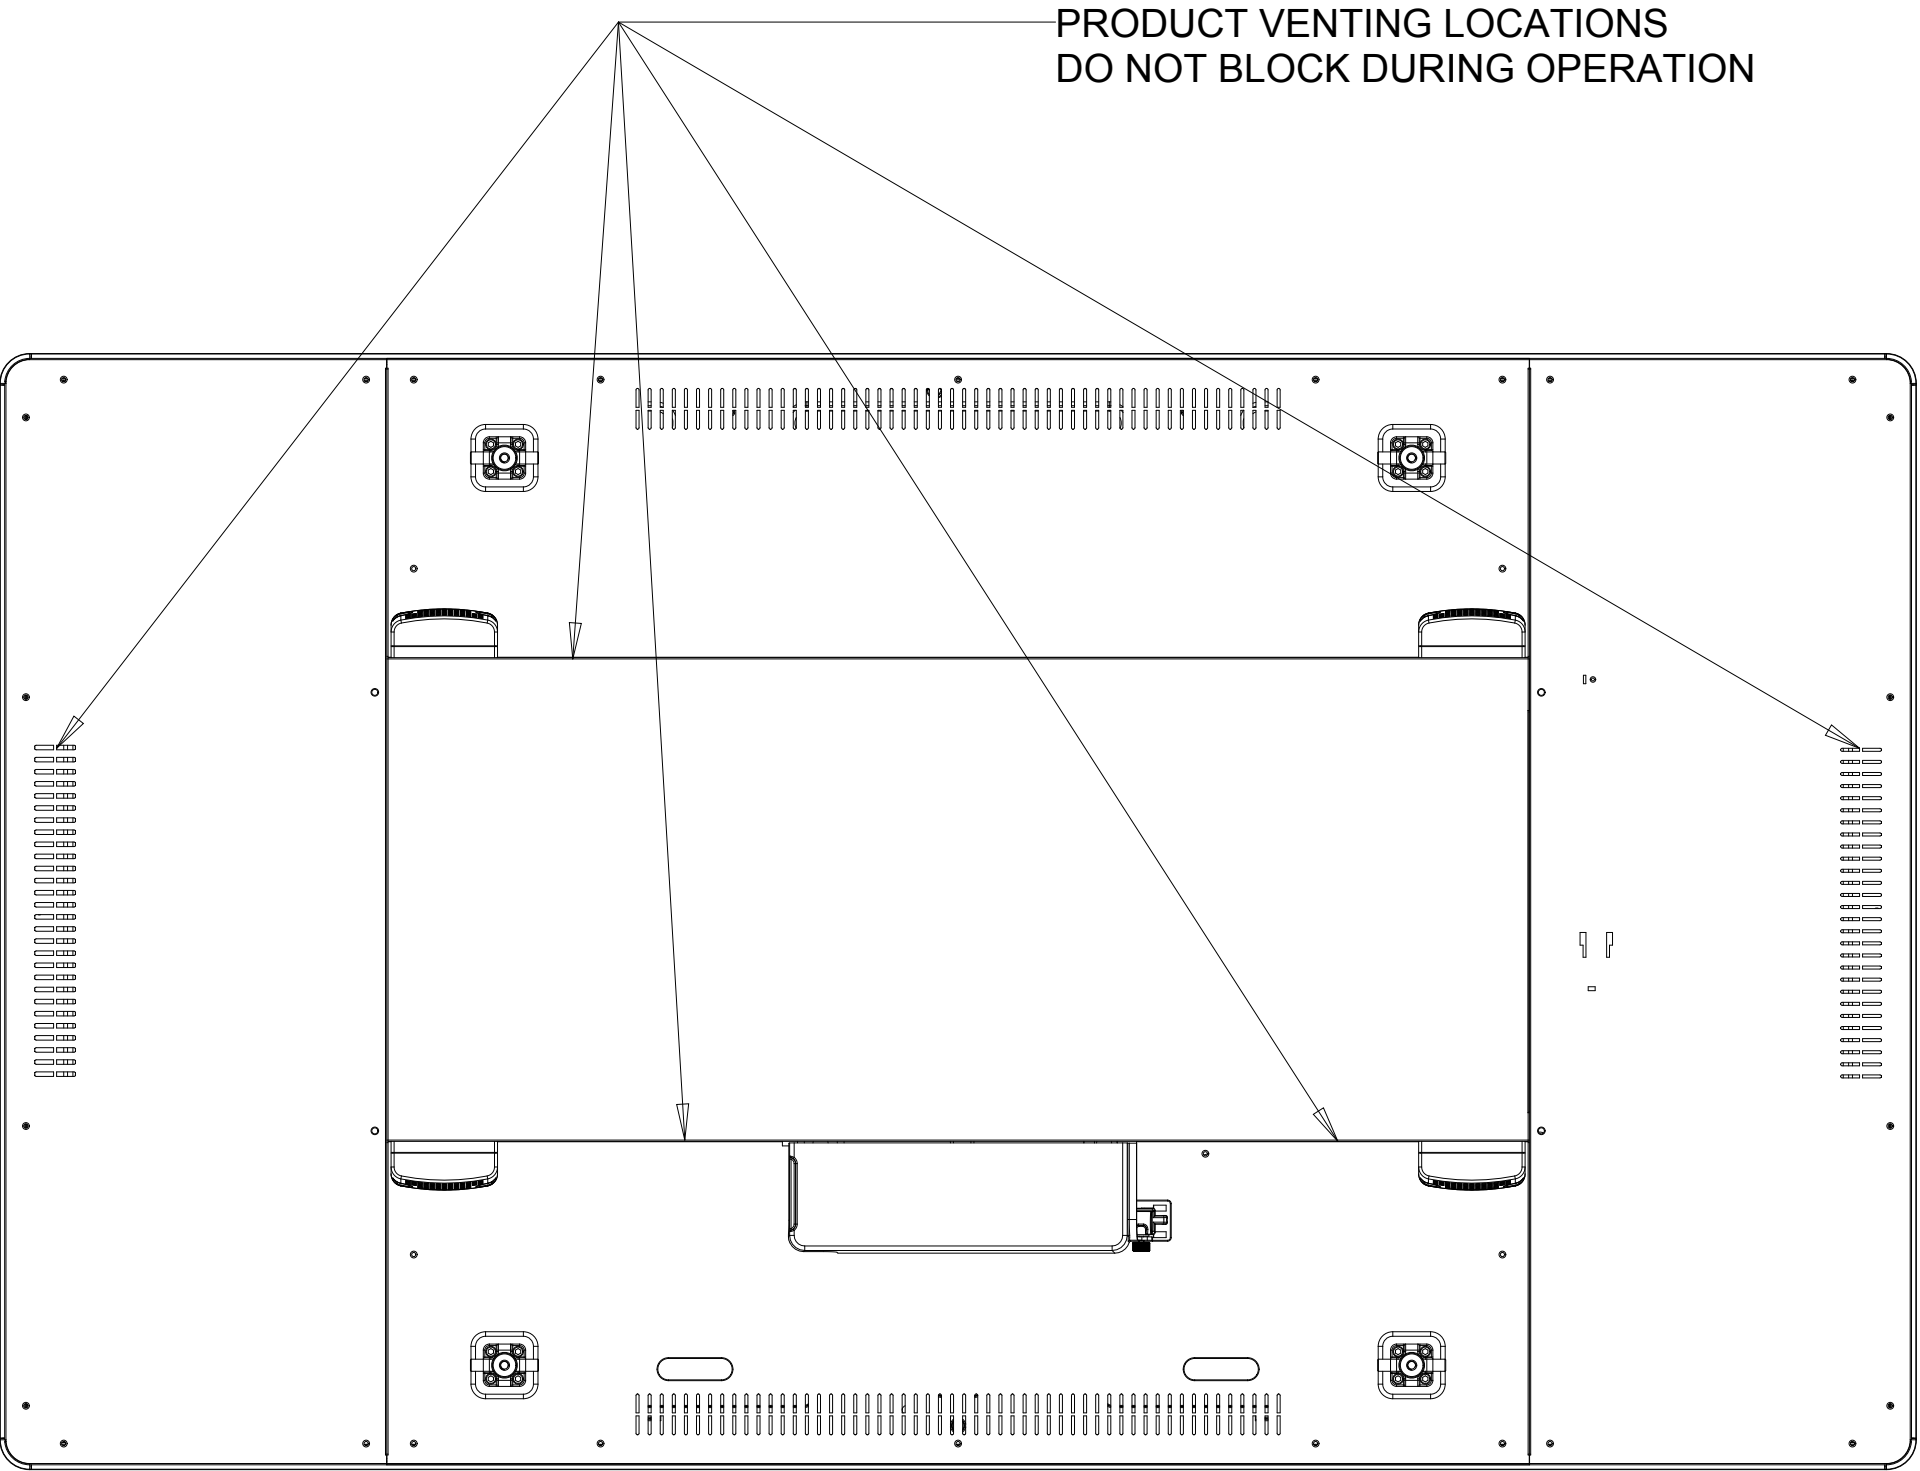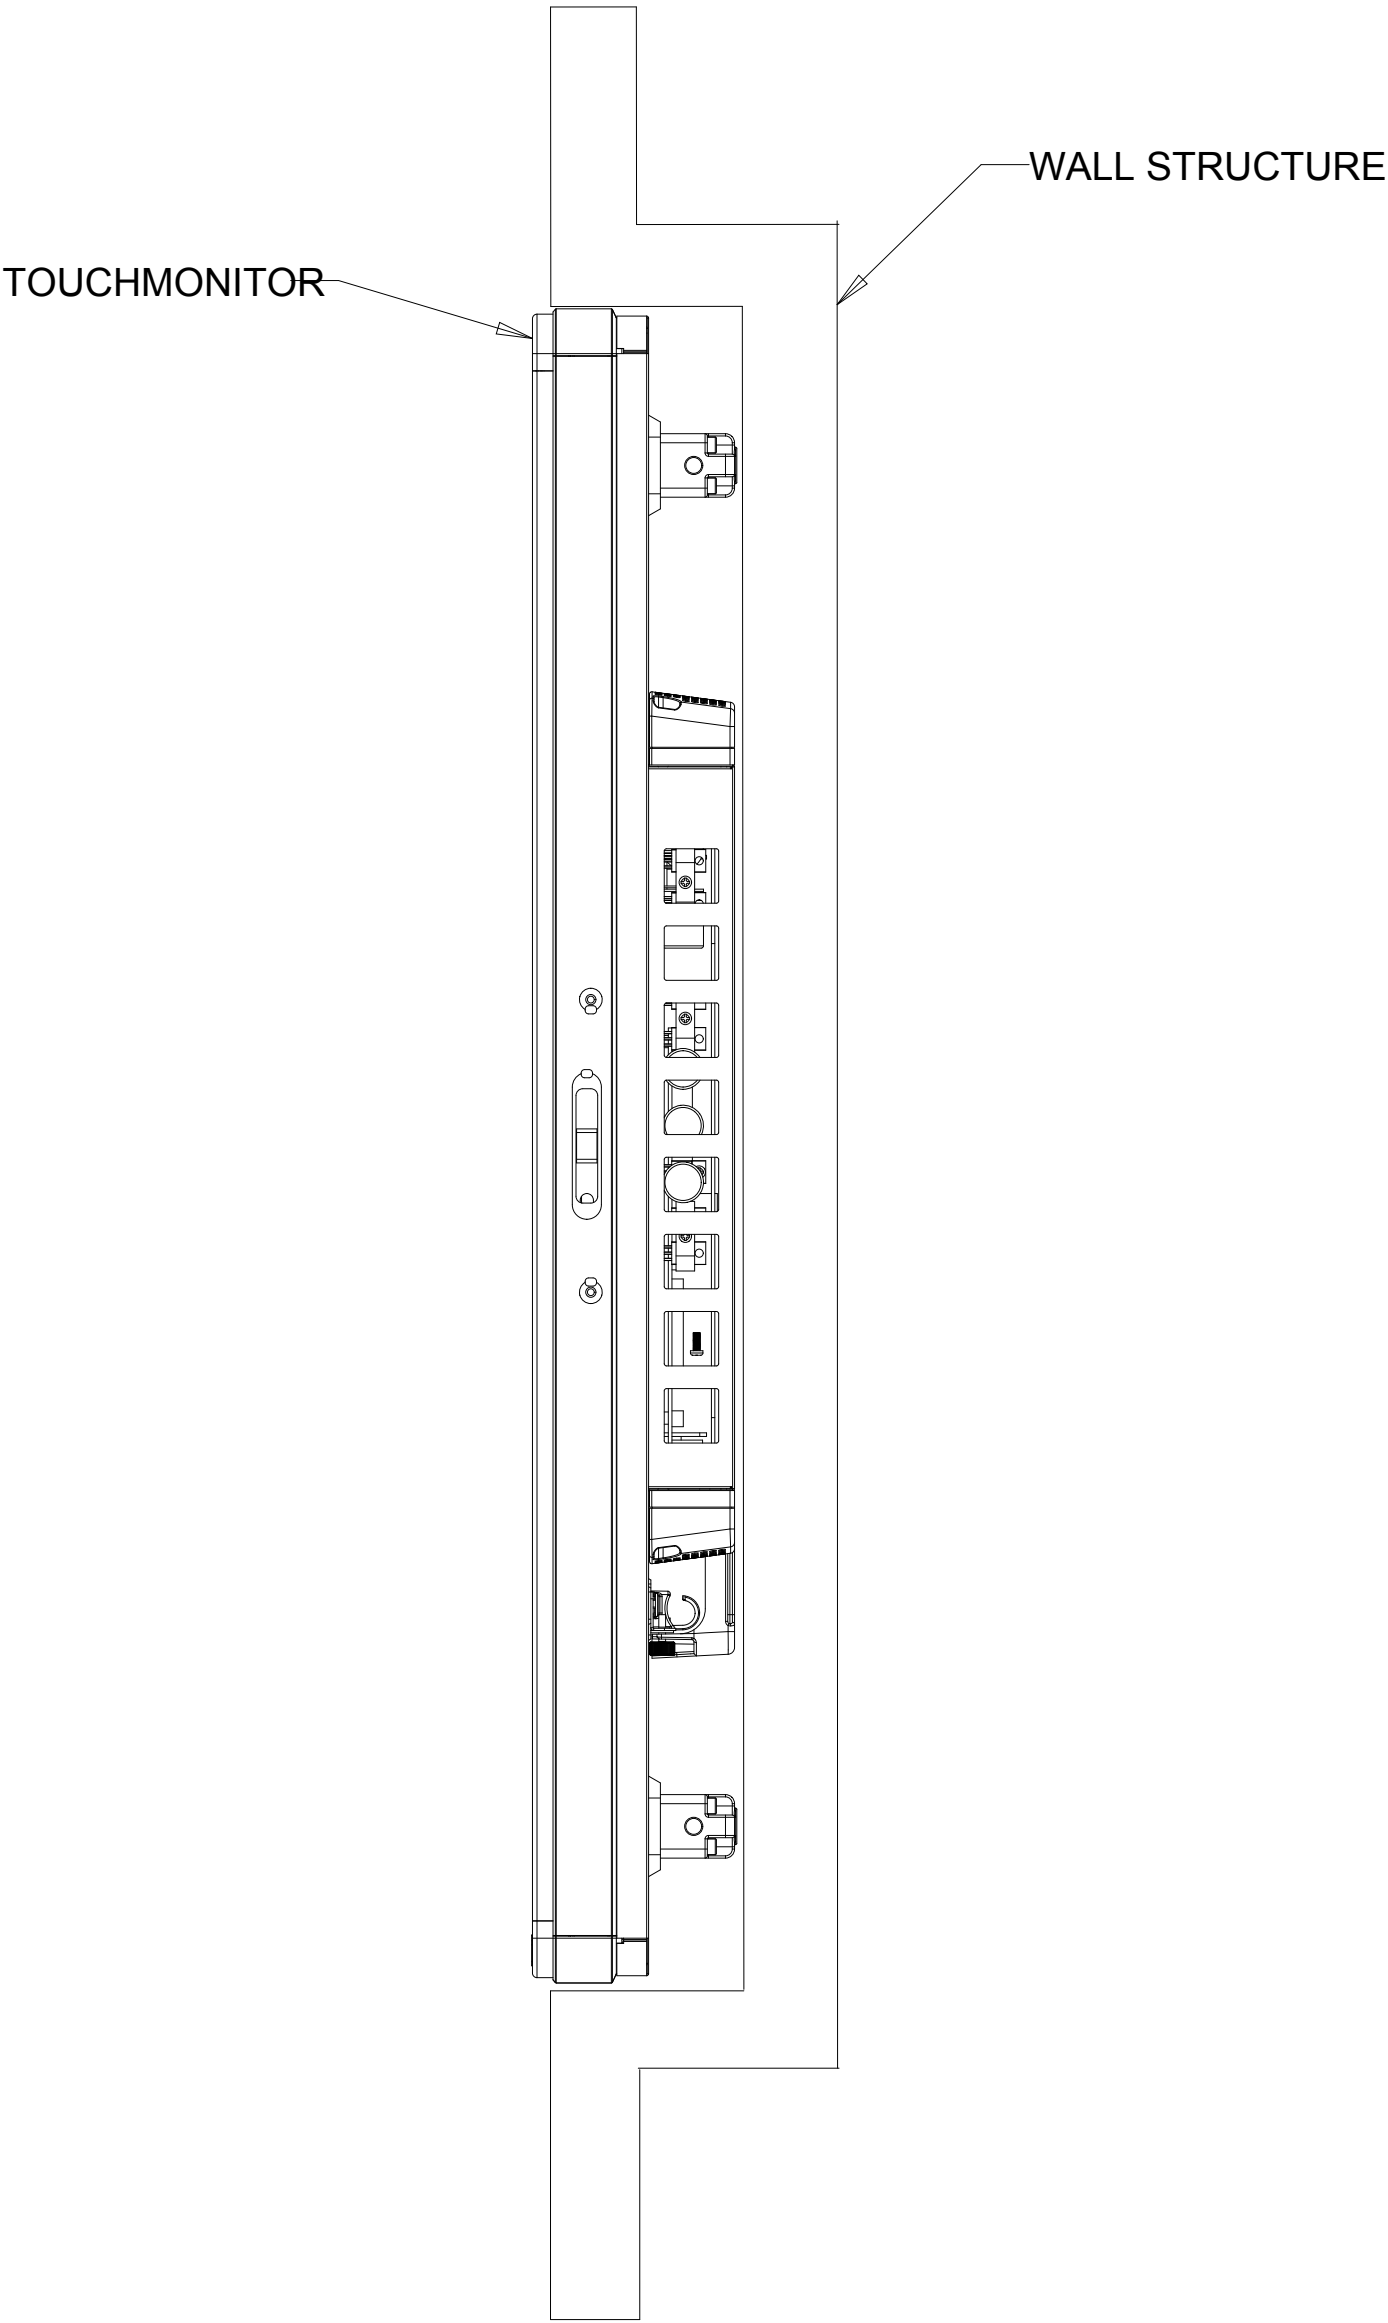





THERMAL RECOMMENDATIONS
TABLE-TOP ORIENTATION

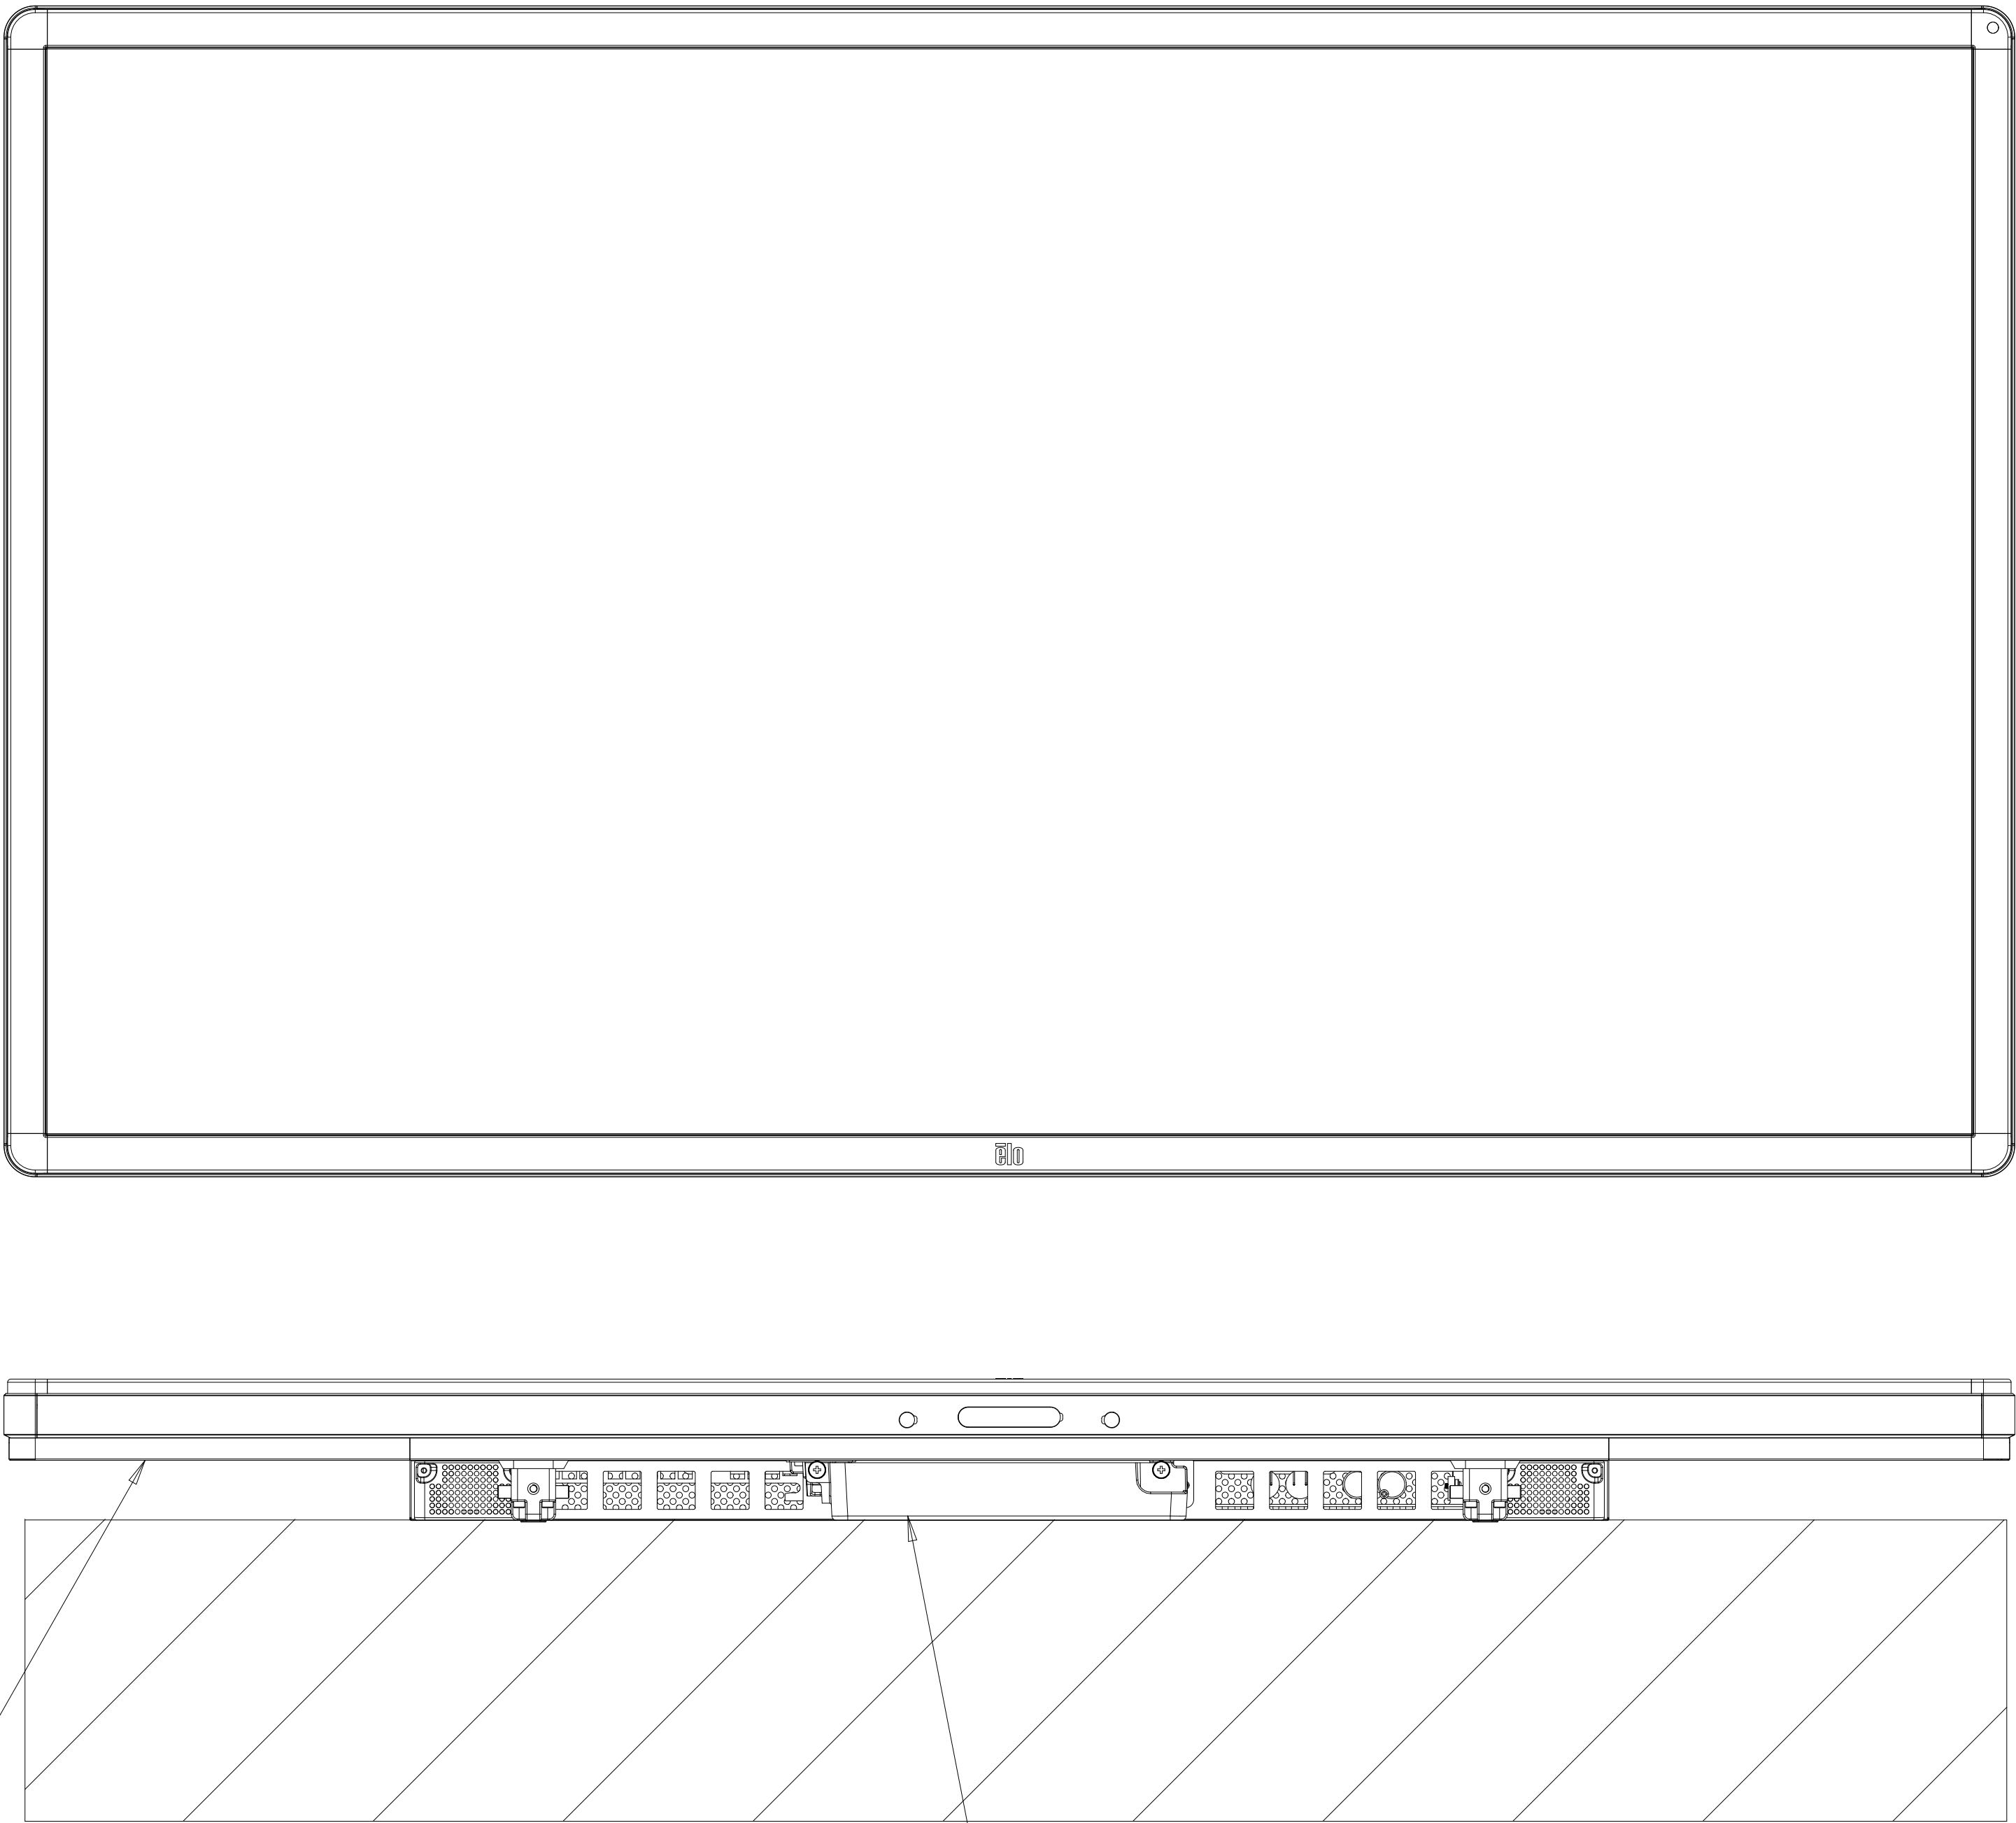


PRODUCT VENTING ALL AROUND MONITOR
MUST BE KEPT OPEN DURING OPERATION
TO MAINTAIN SAFE OPERATING TEMPERATURE

WHEN MOUNTED IN TABLE-TOP ORIENTATION, DO NOT ALLOW
AIR TEMPERATURE BELOW MONITOR TO EXCEED OPERATING TEMPERATURE SPECIFICATIONS.
RECOMMENDATION: INSTALL AIR CIRCULATION DEVICES ABLE TO MONITOR AND CONTROL
AIRSPACE TEMPERATURE UNDER THE TOUCHMONITOR SO IT WILL COMPLY WITH
OPERATING TEMPERATURE SPECIFICATIONS

OPTIONAL WALLMOUNT KIT
P/N E248743

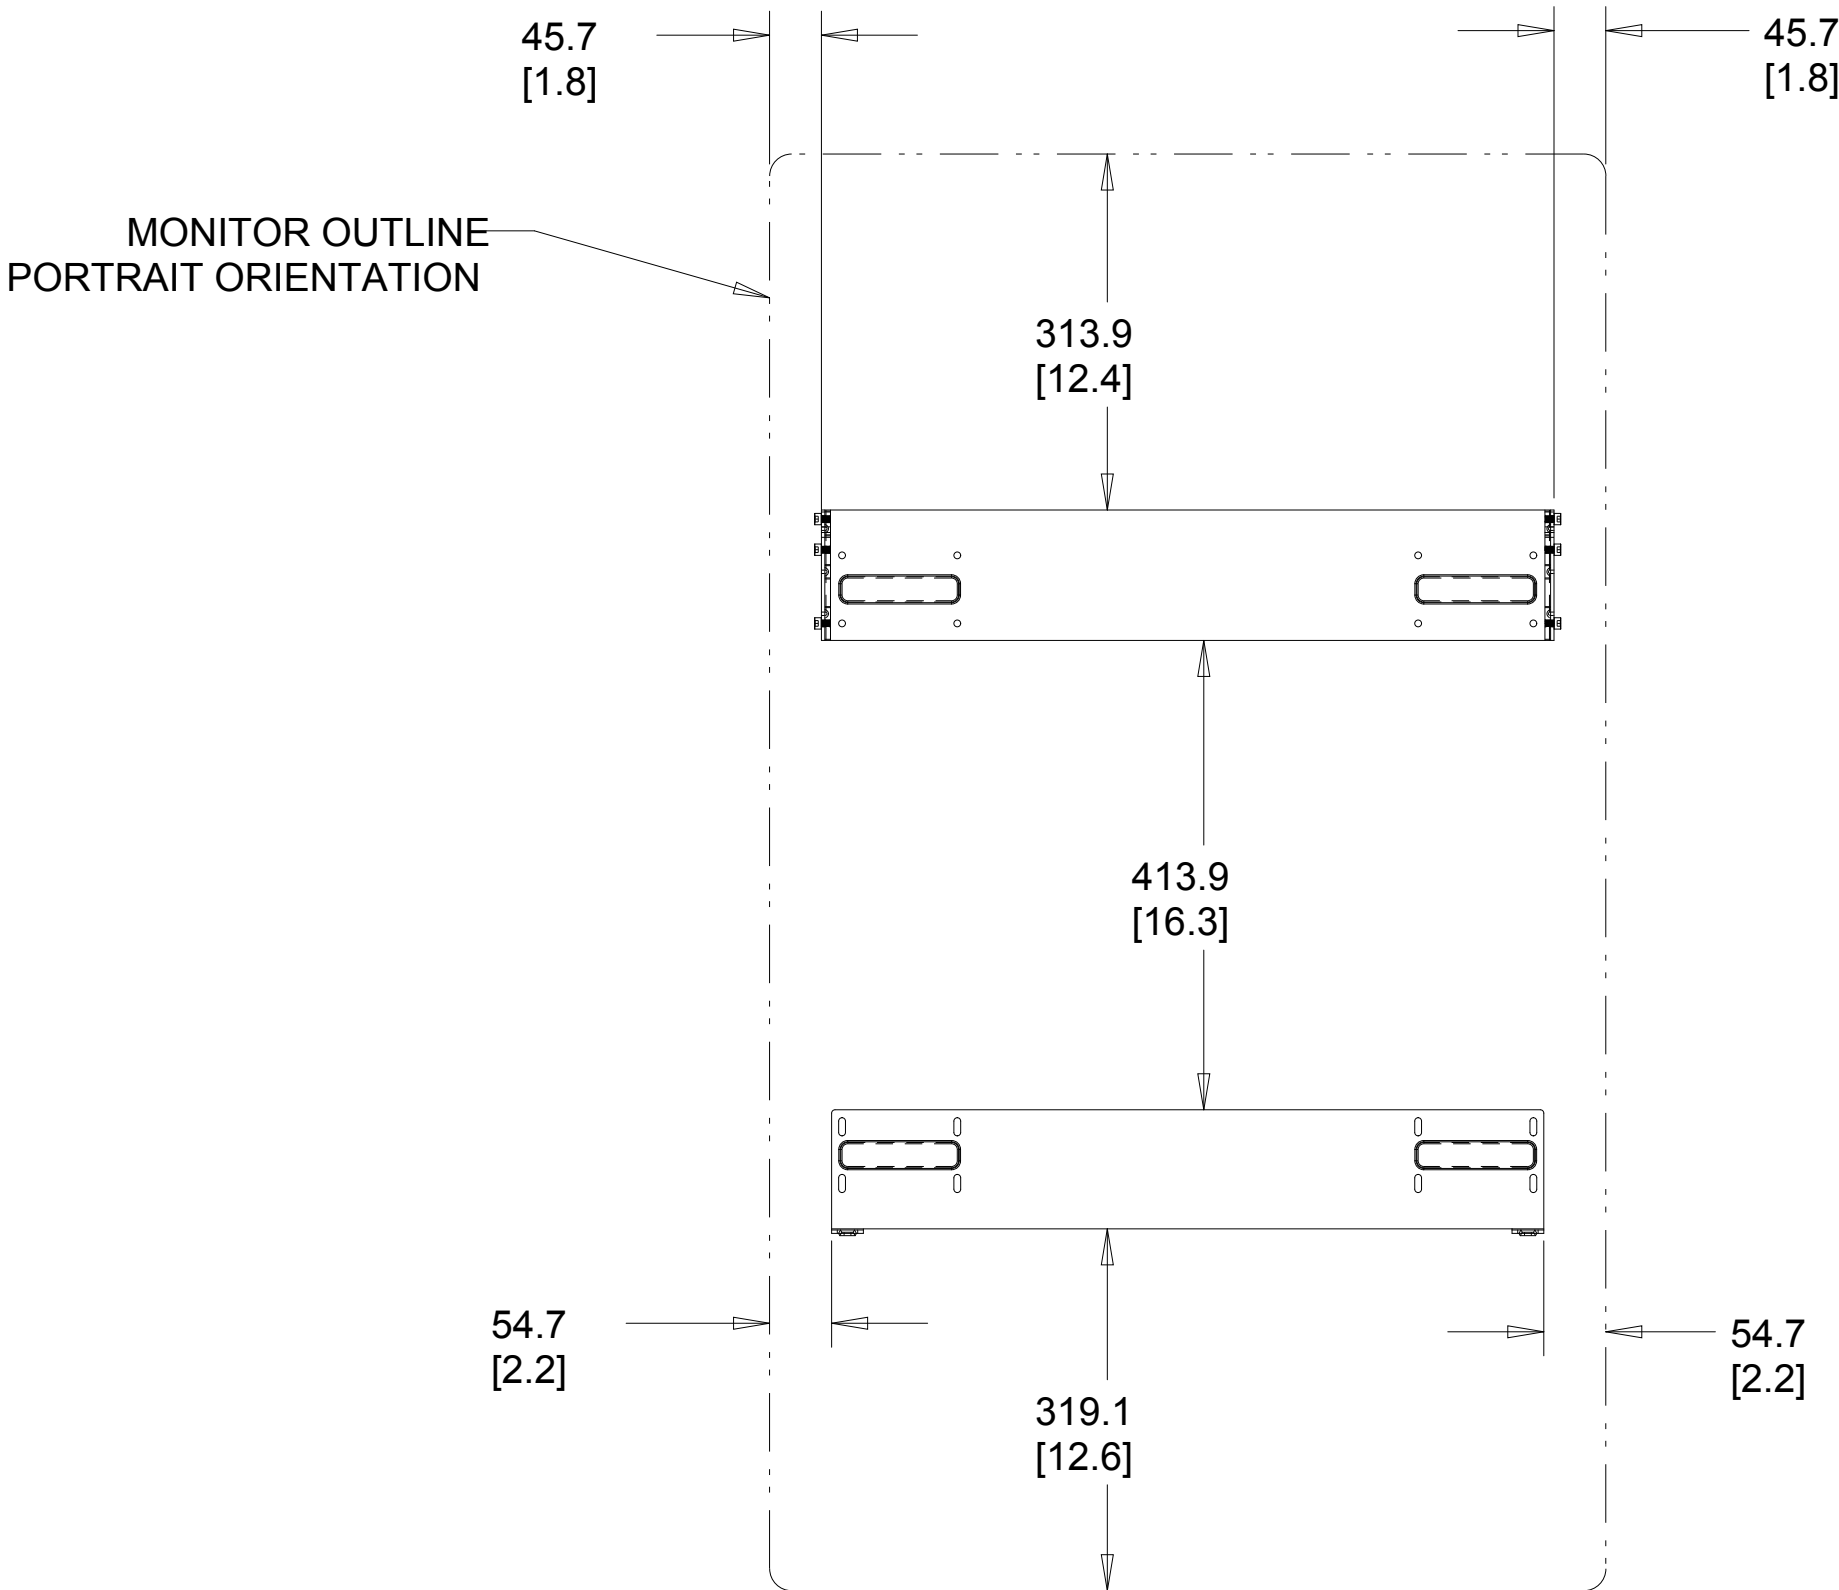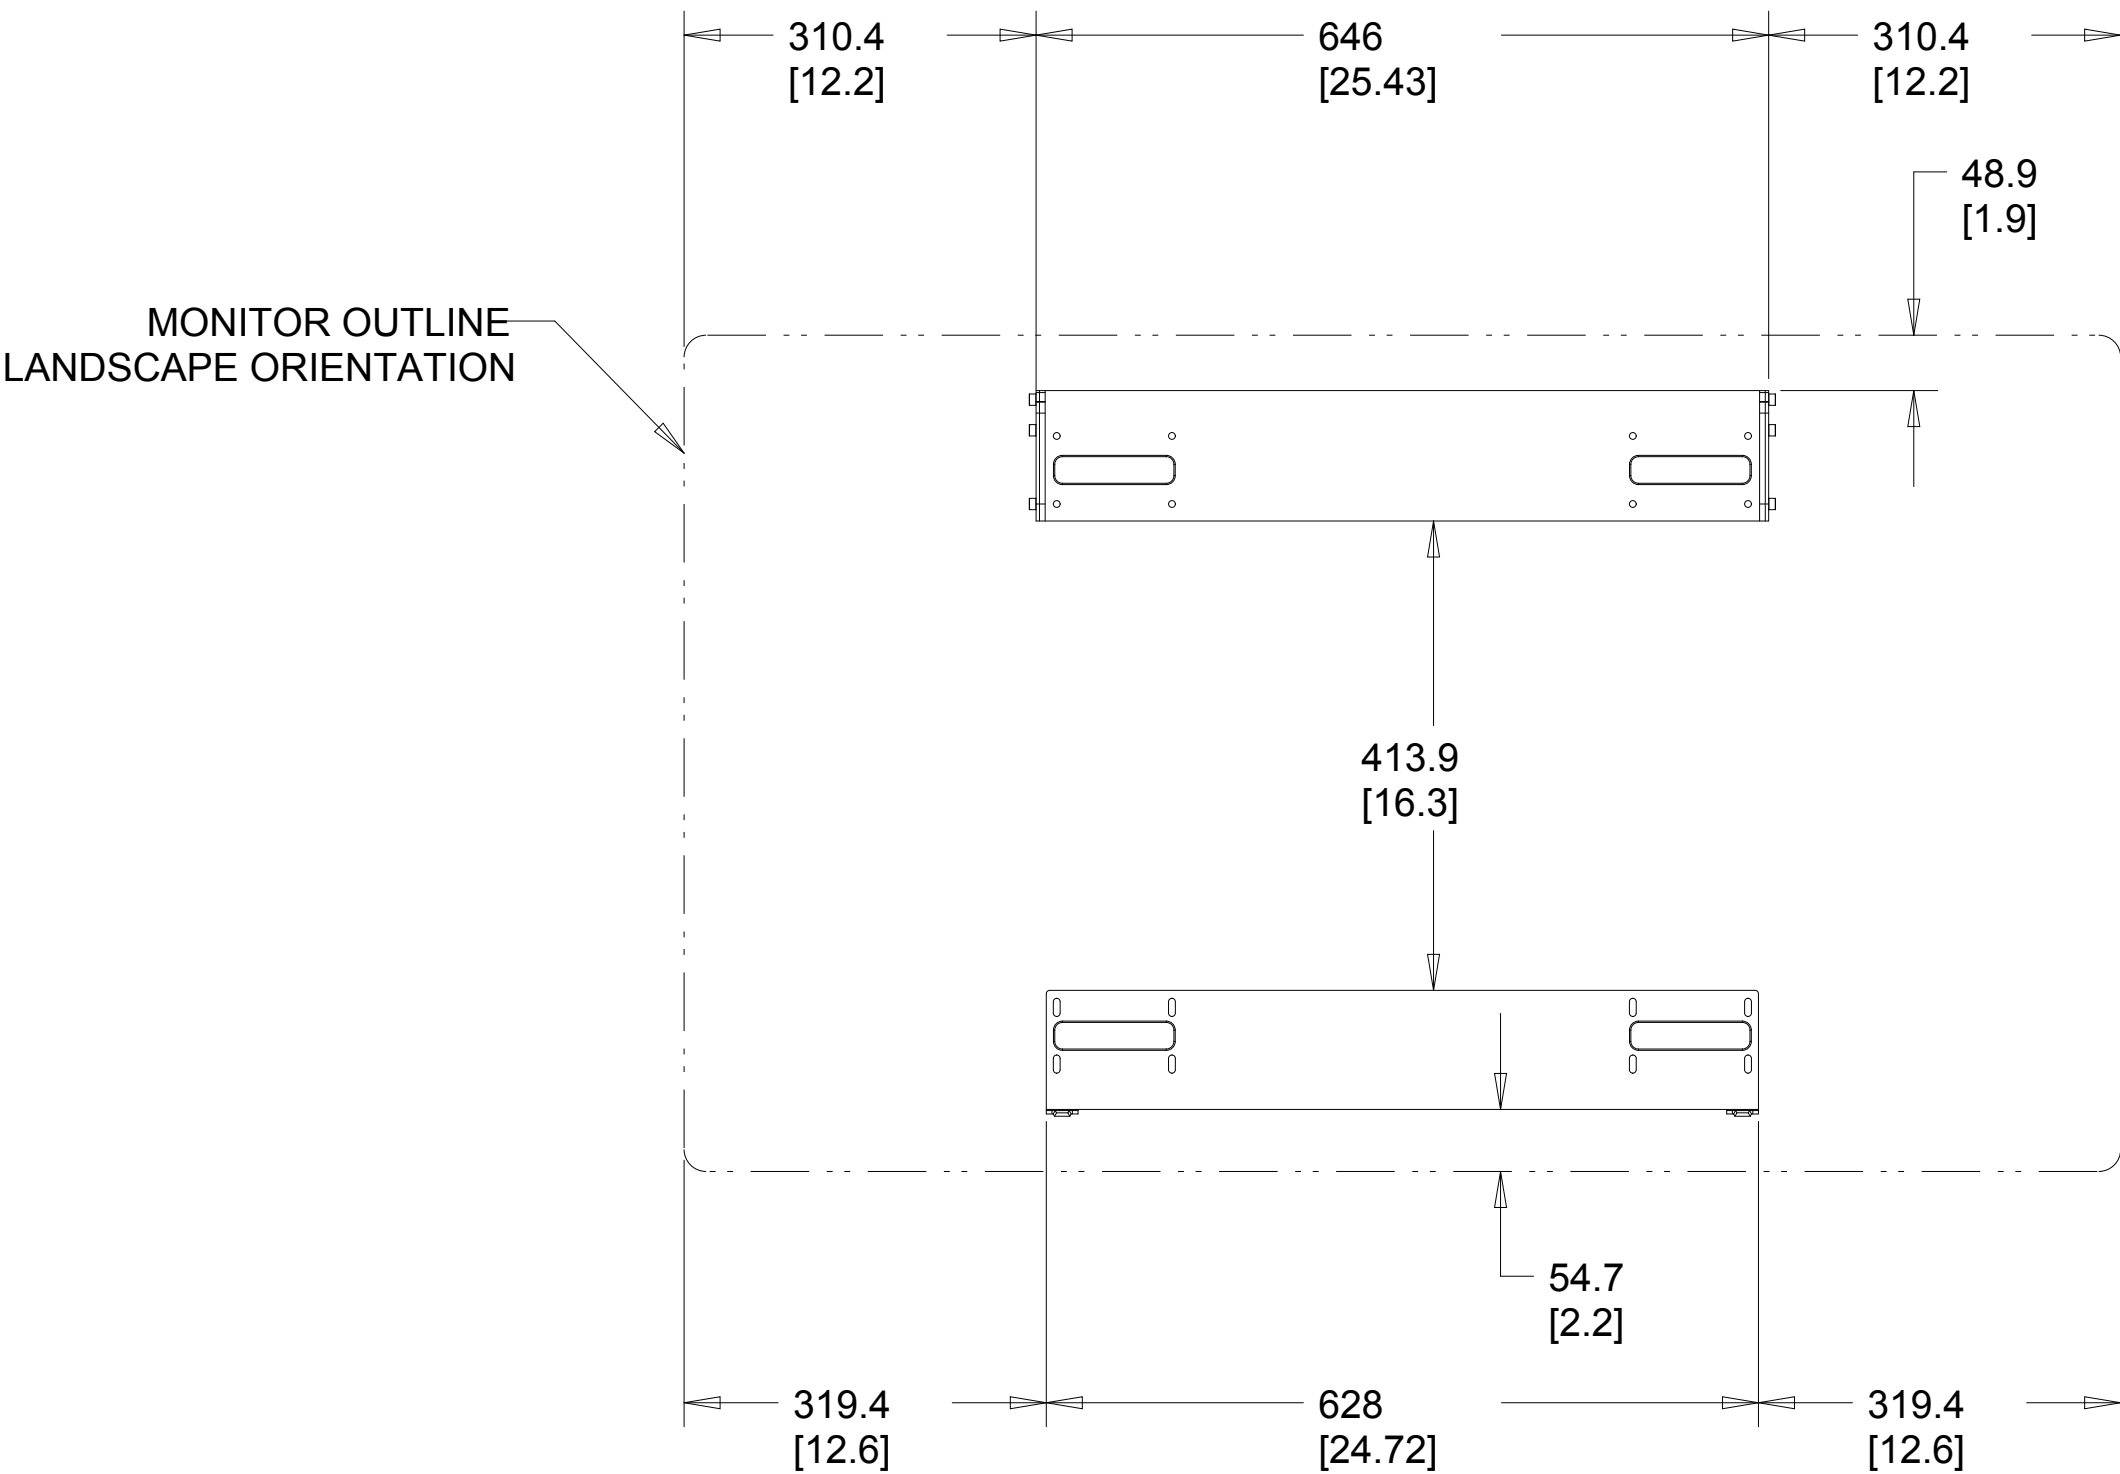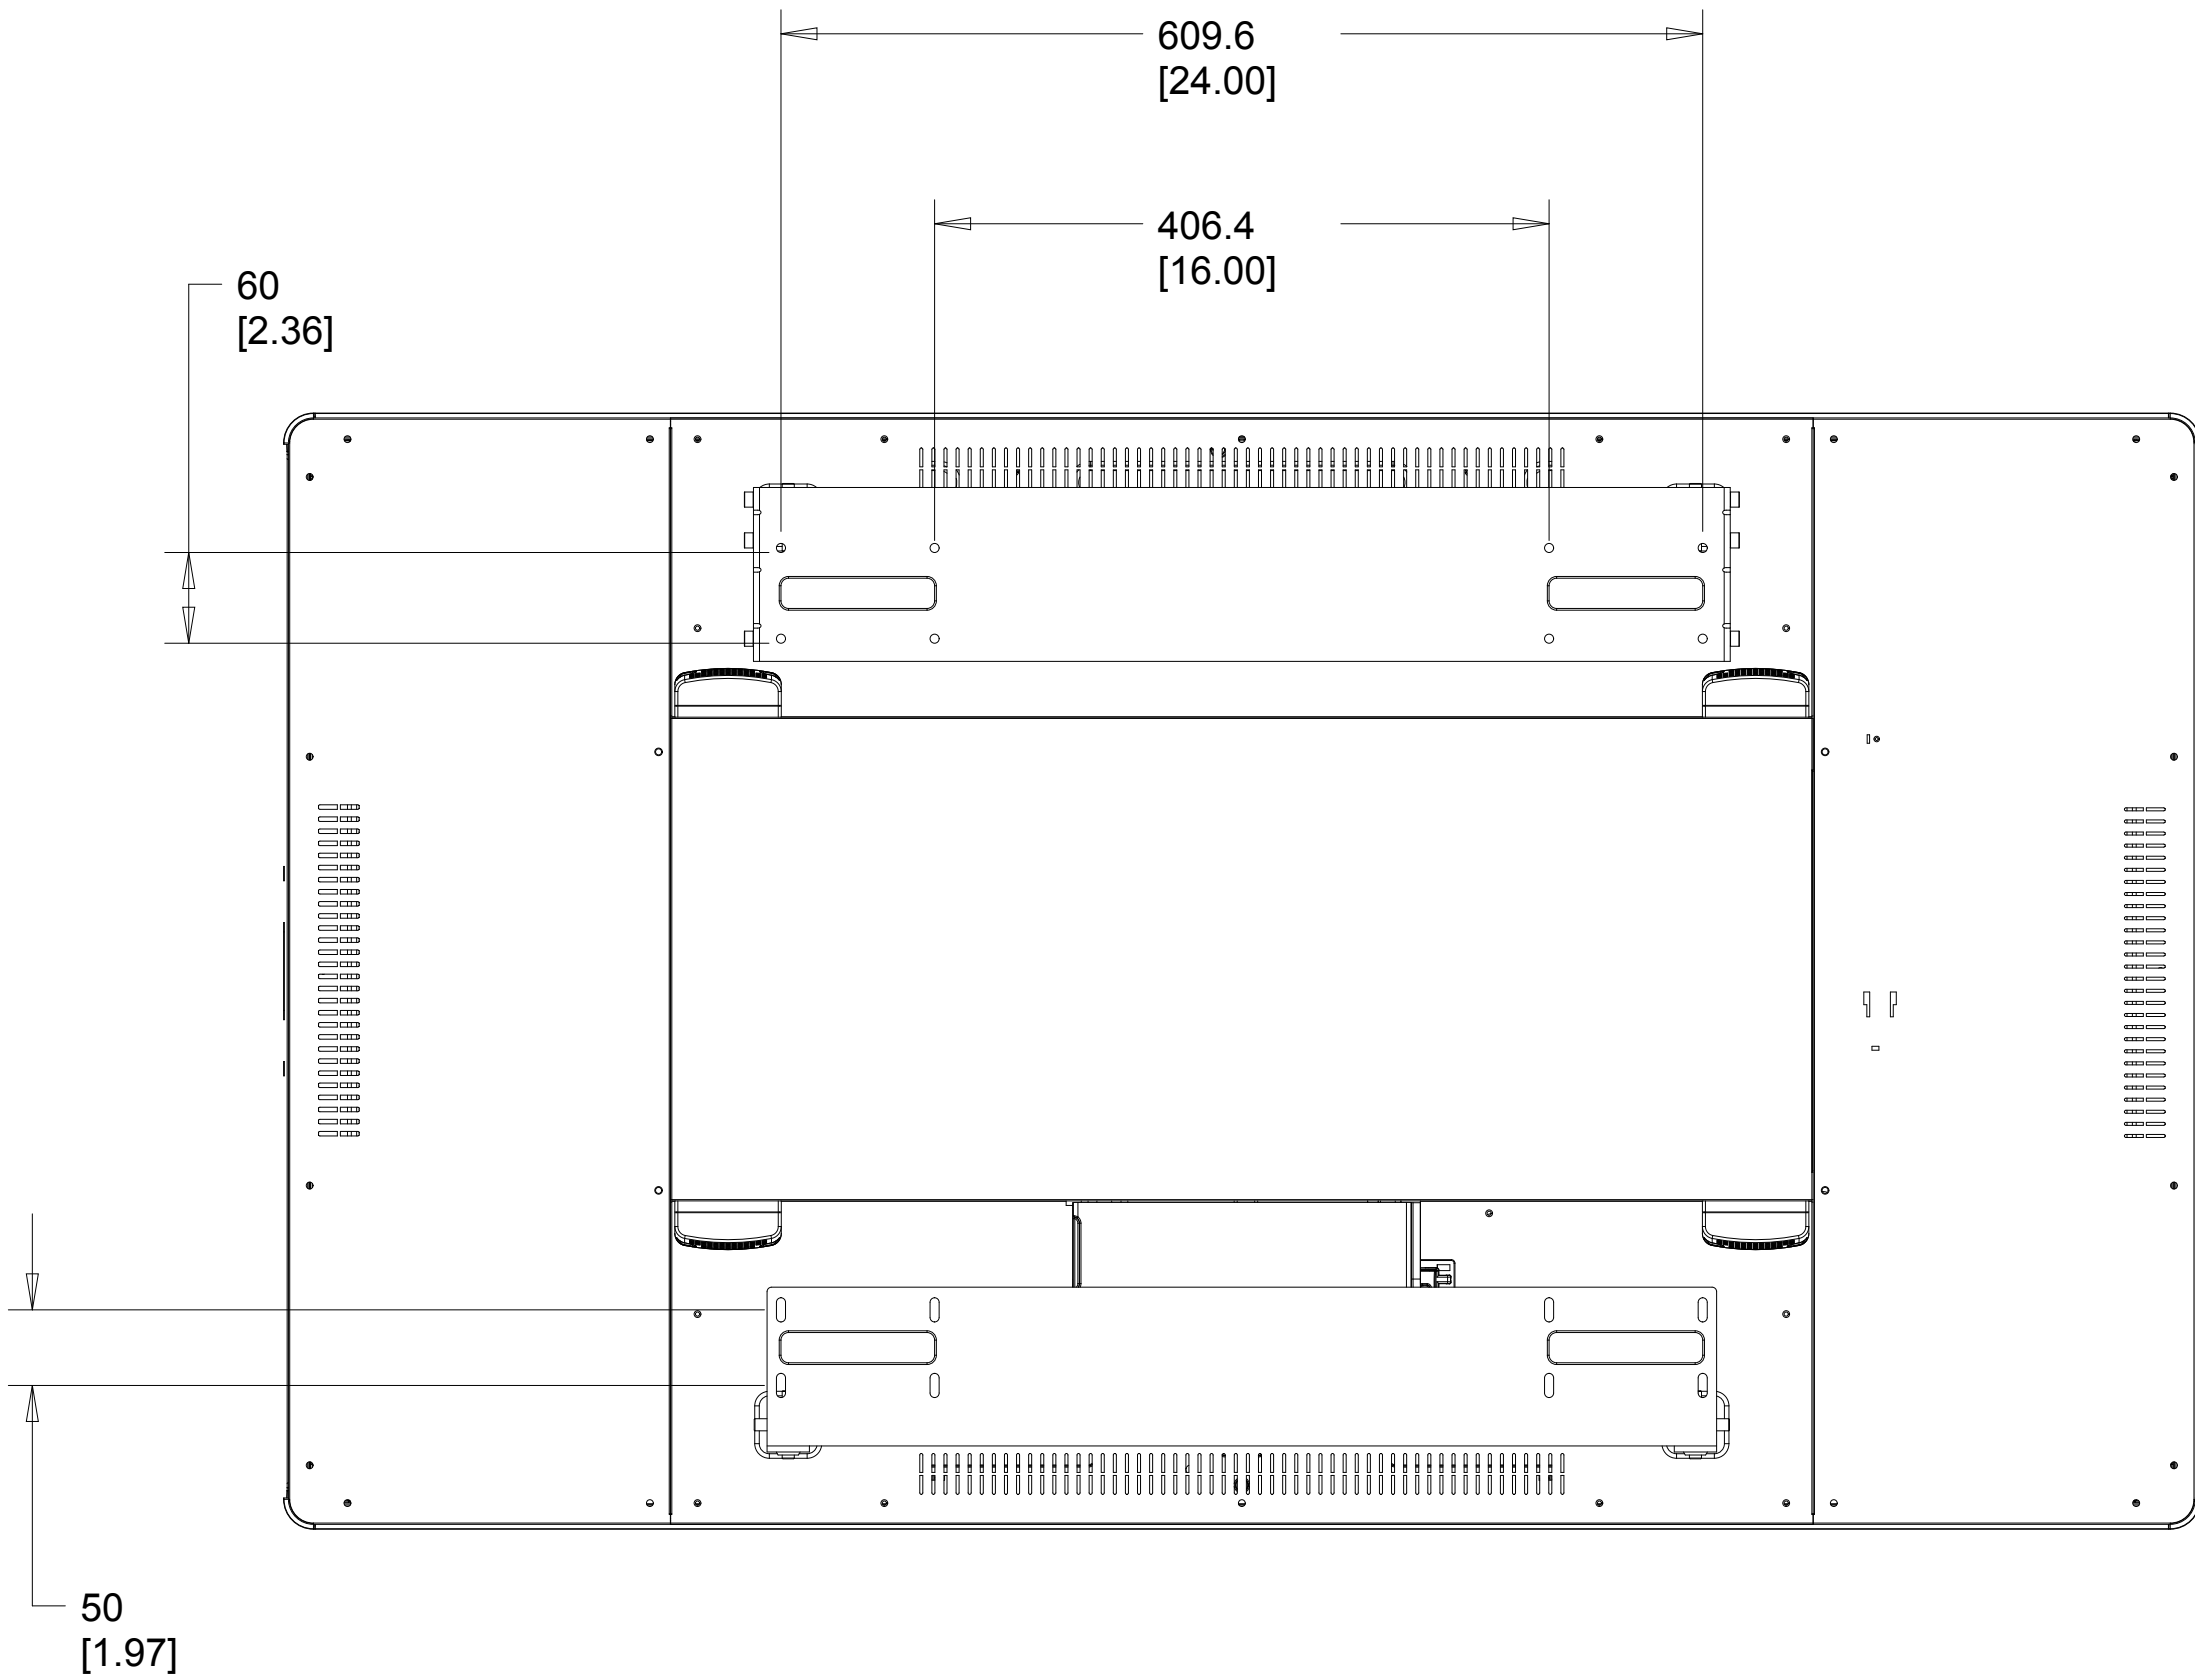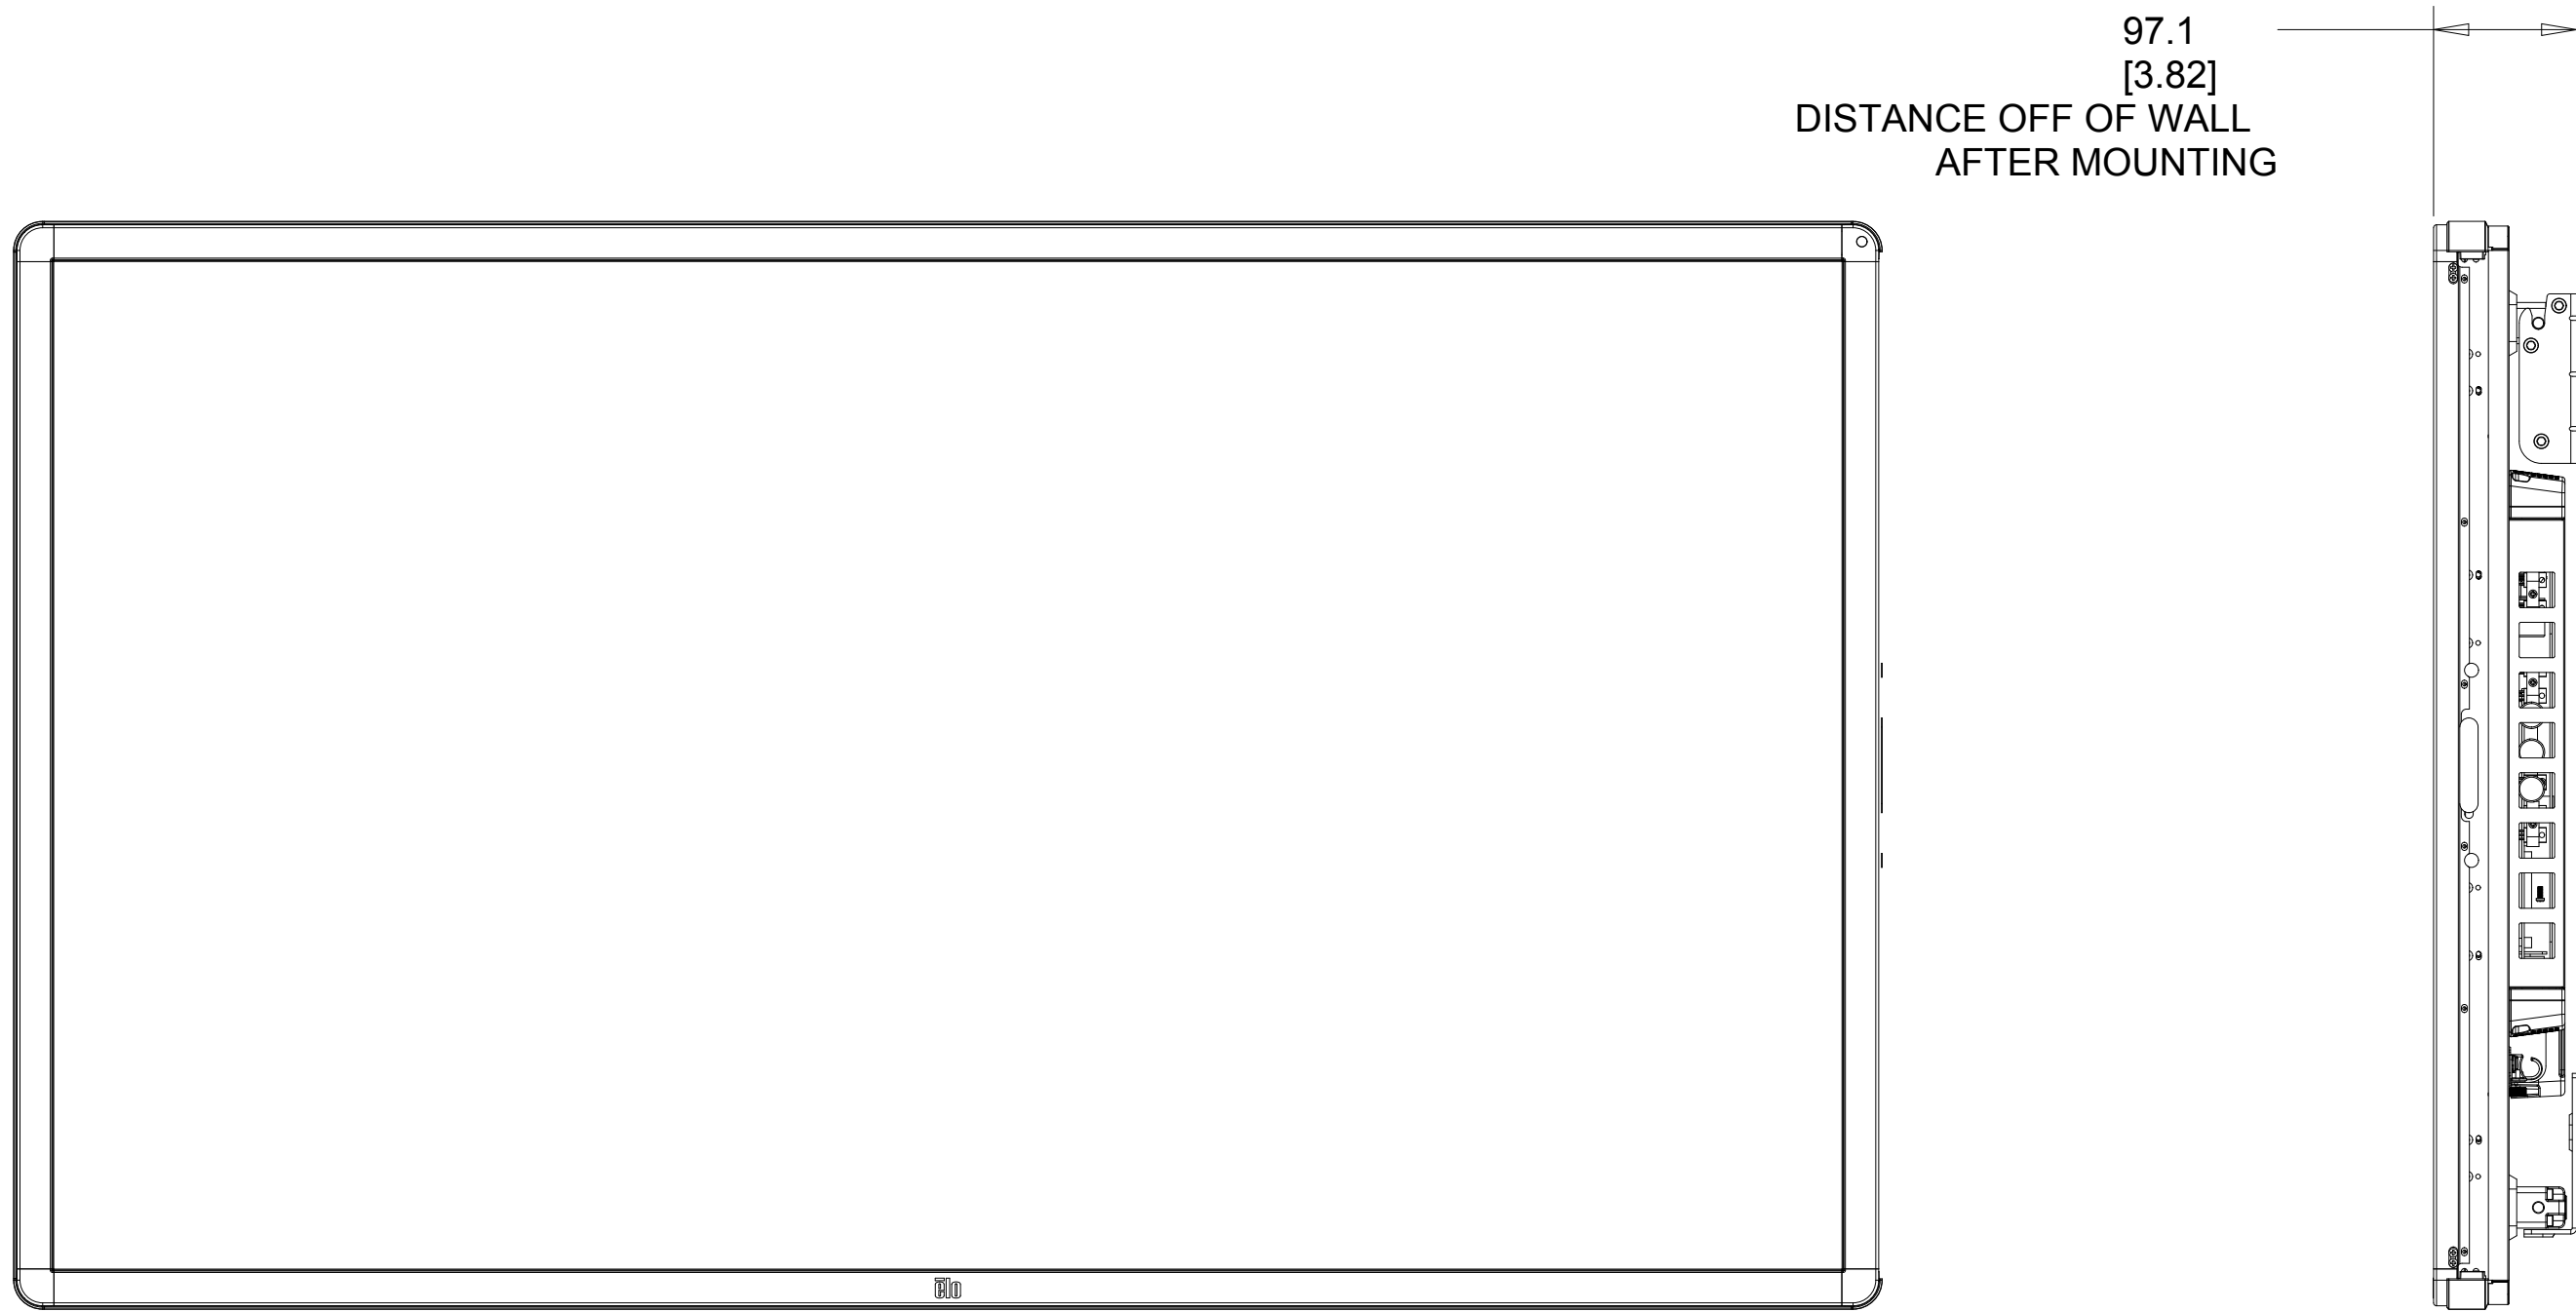


OPTIONAL RFID KIT P/N E031451

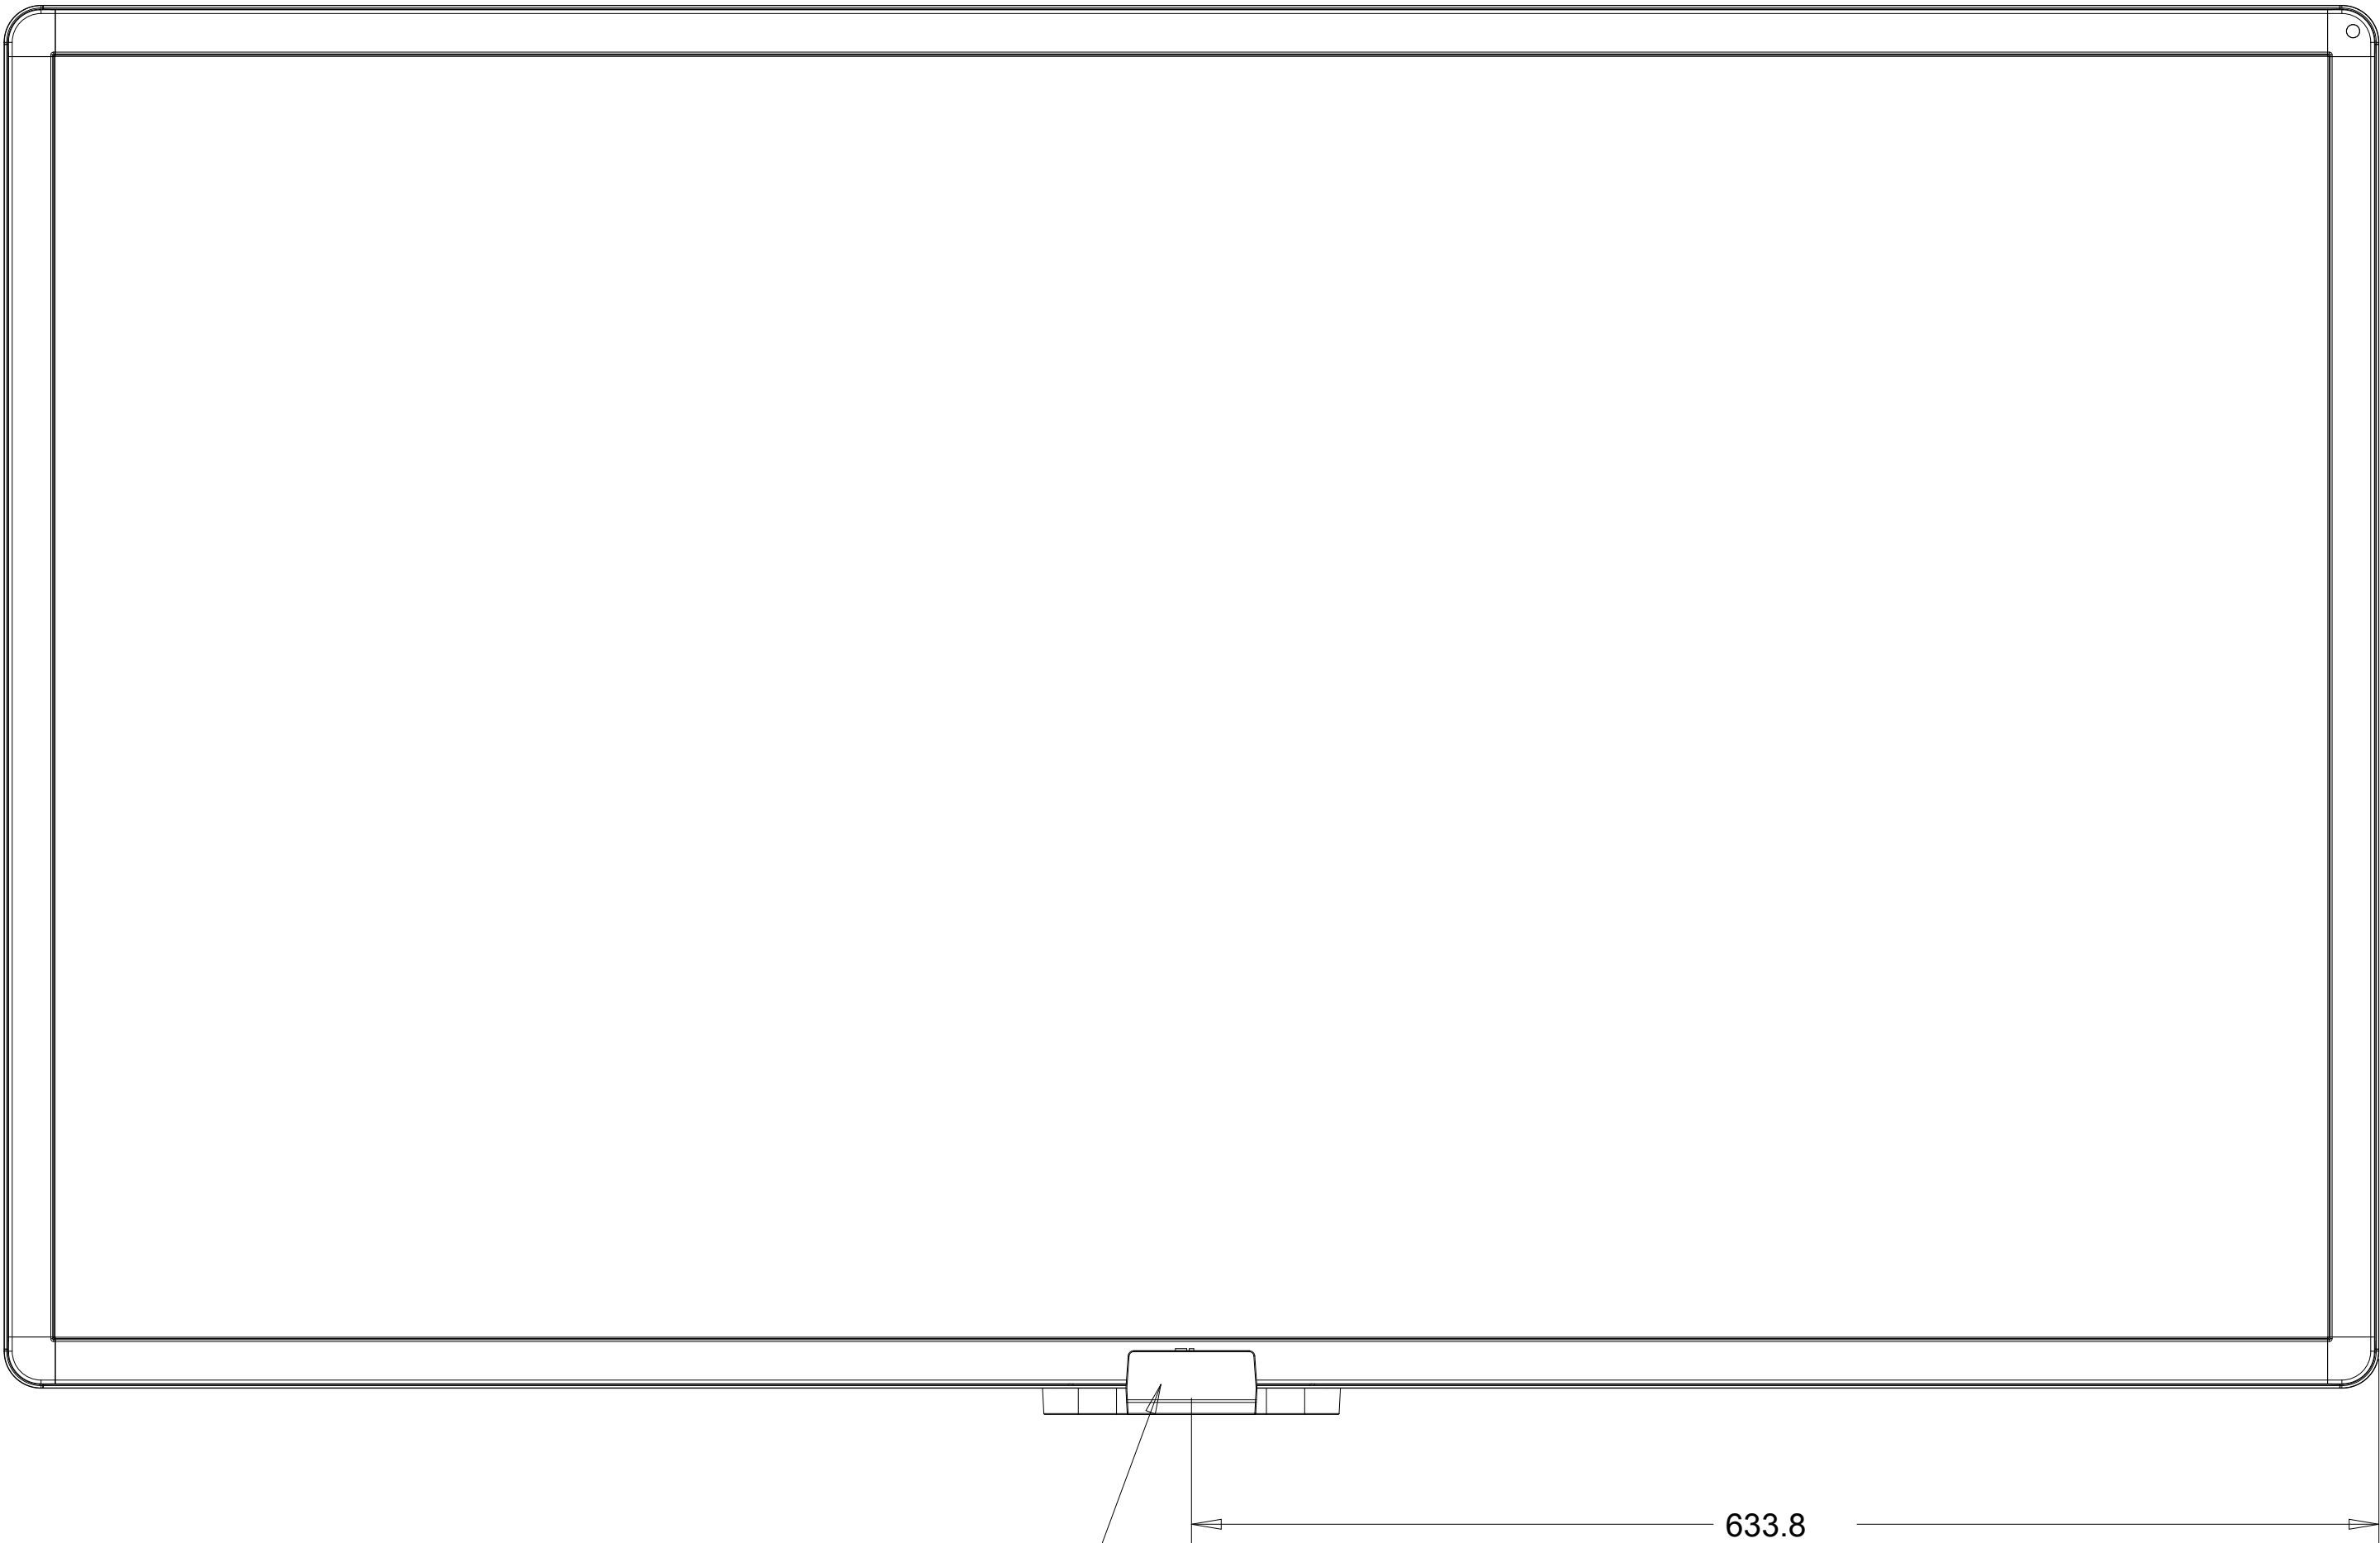

ANTENNA LOCATION

RECOMMENDED PLACEMENT ON BOTTOM SIDE

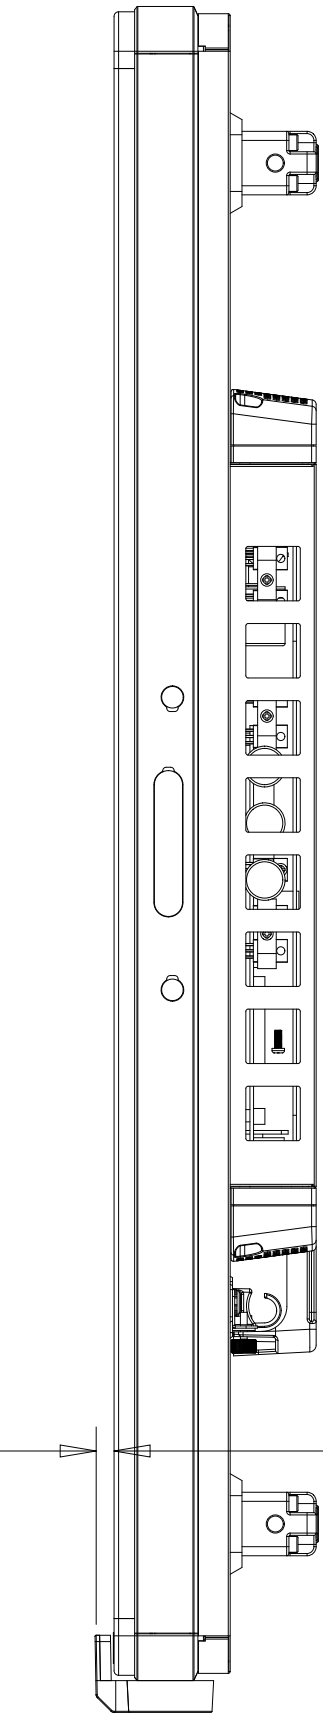

7.9
[.3]
DISTANCE ABOVE BEZEL