

AccuTouch Five-Wire Resistive Touchscreens

For Human-Machine Interface

AccuTouch touchscreens, the proven market leader in five-wire resistive technology, are the preferred solution for applications that demand reliability, input flexibility, and contamination resistance. AccuTouch resistive touchscreens, with proprietary Elo Touch Solutions technology, deliver a touch response that is drift-free and accurate in high-use applications. Compare the five-wire design of AccuTouch, where both X and Y measurements are made on a stable rear glass layer where other resistive touchscreen designs use a flexing plastic cover-sheet to measure only one axis. As a result, AccuTouch resistive touchscreens provide a longer product life backed by a five-year warranty—withstanding more than 35 million touches versus the one-year warranty typical with shorter life four and eight-wire touchscreens from other manufacturers. AccuTouch touchscreens can be sealed against contamination to support NEMA 4/4x/12 and IP65 standards. AccuTouch touchscreens are the ideal solution for point-of-sale (POS), voting machines, industrial automation, medical equipment, retail, office, and pharmacy automation.

AccuTouch touchscreens are available in four configurations: improved, enhanced, true-flat and Zero-bezel. With improved and enhanced AccuTouch touchscreens, a flat flexible cable is soldered to the glass. AccuTouch true-flat and Zero-bezel touchscreens use a flexible printed circuit cable that virtually elimi-

nates the cable attachment bump that is typical on most resistive touchscreens and enable a smooth, flat integration.

Benefits

- Stable, drift-free operation
- Broad input flexibility
- Contamination resistance
- Accuracy in high-use applications
- Can be sealed to support NEMA 4/4x/12 and IP65 standards upon integration
- Flat-cable attachment for seamless integration
- 3H, 4H pencil hardness resists scratching

Applications

- Point-of-sale (POS) terminals
- Voting machines
- Industrial automation
- Medical equipment
- Office automation
- Retail automation
- Pharmacy automation

AccuTouch Five-Wire Resistive Specifications

MECHANICAL

Input Method	Finger, gloved hand, or stylus activation
Available Sizes	5.7" to 24.0"; visit www.elotouch.com for full specifications and other offerings

ELECTRICAL

Positional Accuracy	Standard deviation error is less than 0.080 (2mm)
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096
Touch Activation Force	Typically less than 4 ounces (113 grams)
Controller	Board: Serial (RS232) and USB Chip: Serial (RS232) and USB

OPTICAL


Light Transmission	HL products: 80% \pm 5% at 550nm wavelength
--------------------	---

ENVIRONMENTAL


Temperature/ Relative Humidity	Operating: AccuTouch enhanced, AccuTouch true-flat, AccuTouch Zero-bezel—90% RH at 122°F (50°C) max AccuTouch improved—90% RH at 140°F (60°C) max Storage: AccuTouch enhanced, AccuTouch true-flat, AccuTouch Zero-bezel—90% RH at 122°F (50°C) max for 240 hrs, non-condensing AccuTouch improved—90% RH at 140°F (60°C) max for 240 hrs, non-condensing
Altitude	Operating: 10,000 ft (3,048m) Storage/transport: 50,000 ft (15,240m)
Chemical Resistance	Industrial chemicals: acetone, methylene chloride, methyl ethyl ketone, isopropyl alcohol, hexane, turpentine, mineral spirits, unleaded gasoline, diesel fuel, motor oil, transmission fluid, antifreeze. Food-service chemicals: vinegar, coffee, tea, grease, cooking oil, salt, plus most commercial cleaners including ammonia-based glass cleaner and laundry detergent.
Electrostatic Protection	Per EN 61000-4-2, 1995: Withstands 20 discharges up to 15kV
Agency Approvals	UL, cUL, TÜV, CE, FCC Class A
Sealability	Can be sealed to meet NEMA 4 and 12 and IP 65 standards

DURABILITY


Surface Durability	AccuTouch enhanced, AccuTouch improved: meets pencil hardness 3H per ASTM D3363 AccuTouch true-flat, AccuTouch Zero-bezel: meets pencil hardness 4H per ASTM D3363
Expected Life	Operationally tested to 35 million touches in one location without failure
Warranty	Touchscreen: 5-year limited warranty Controller: 5-year limited warranty

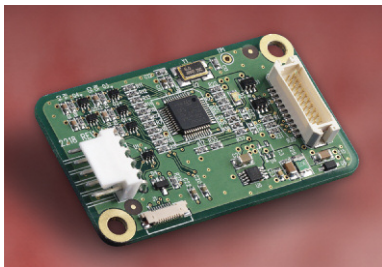

2218 combo controller board

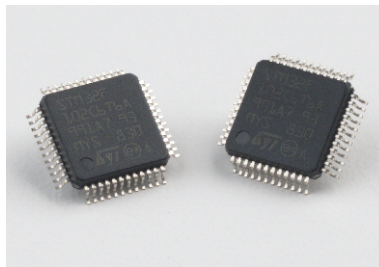

COACH V combo controller chip

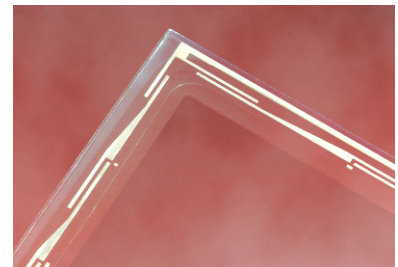

Z-border pattern for enhanced linearity

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

Macroservice, S.A.
C/General Margallo, 29 Local
28020 Madrid - Spain



informacion@macroservice.es - www.macroservice.es
T. +34 (91) 571 52 00 - F. +34 (91) 571 19 11

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. AccuTouch, Elo (logo), and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc.
Copyright 2012 Elo Touch Solutions, Inc. All rights reserved. 10/12

www.elotouch.com

