



**15" POS LCD Monitor**



**Features**

1. Robusted plastic housing for touch operation
2. Low power consumption only 10W with LED backlight
3. Universal power brick with changeable plug
4. VESA 75 x 75 mm wall mounting standard
5. User friendly OSD control buttons
6. Integrated with 5 wires resistive touch (**D150VR**)
7. Smart cable management
8. Small footprint

**Specification**

Model	D150VN / D150VR
Cabinet Color	Black
Touch	5 wires resistive touch ( <b>D150VR</b> )
Display Type	15" diagonal TFT active matrix with LED backlight
Recommended Resolution	1024 x 768
Brightness	300 cd/m <sup>2</sup> (typ.)
Contrast Ratio	600:1 (typ.)
Viewing Angle	160° (H) / 145° (V)
I/O Connectivity	D-Sub VGA 15 pins, DC 12V, USB touch ( <b>D150VR</b> )
Backlight MTBF	30,000 hrs

\* Specification is subject to be changed without prior notice.

**Application**


Supermarket / Chain stores / Hospitality / Factory automation



**Universal power plug**



**I/O indication**

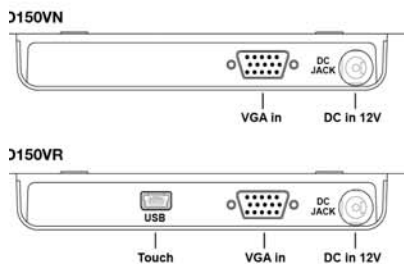

**Dimension (unit: mm)**

