



10.4" Rimless USB LCD Monitor



New Capacitive Touch keys control design provide high durability of operation, also with a thin & whole flat front panel gives an elegant and compact appearance.

Application

Education / Chain stores / Hospitality / Factory automation

Features

1. Rimless front bezel design, spill & dust proof, meets IP54 requirement
2. Low power consumption only 8W with LED backlight
3. Extra USB I/O ports available for more POS accessories (**P104TR**)
4. Cable cover to prevent unexpected pull from users
5. Sleek surface throughout monitor's appearance
6. Viewing angle adjustment up to 68°
7. Universal power brick with changeable plug (**P104TR**)
USB bus power for **P104UG** w/o additional power adaptor
8. VESA 75 x 75 mm wall mounting standard
9. Integrated protection glass (**P104UG**) or 5 wires Resistive touch (**P104TR**)
10. Smart cable management
11. Small footprint


Specification

Model	P104UG / P104TR
Cabinet Color	Black or White
Cover Lens	Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93% (P104UG) 5 wires Resistive touch (P104TR)
Display Type	10.4" diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 600
Brightness	300 cd/m ² (typ.)
Contrast Ratio	500:1 (typ.)
Viewing Angle	110° (H) / 150° (V)
I/O Connectivity	USB-A, mini USB x 2, DC 12V in (P104TR) Mini USB (P104UG), optional DC12V in for high brightness


* Specification is subject to be changed without prior notice.



USB DISPLAY

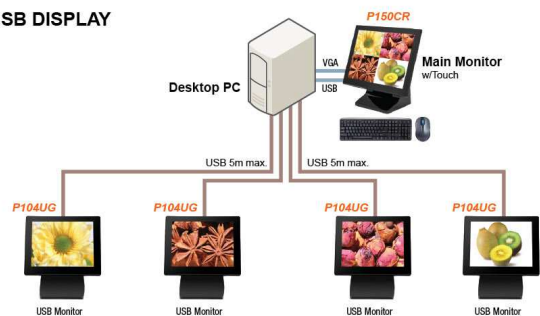

I/O indication

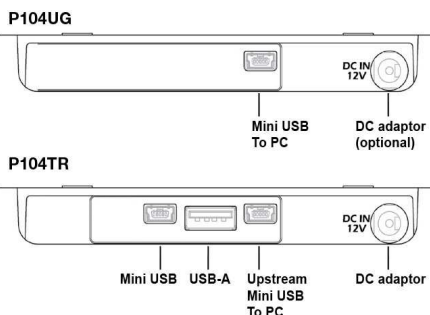

Dimension (unit: mm)

