



8" Rimless POS LCD Monitor



Features

1. Rimless front bezel design
2. Integrated with protection glass (Model: P080VG) or 5 wires resistive flat touch (Model: P080VR)
3. Small footprint
4. VESA 75 x 75 mm wall mounting standard
5. User friendly OSD control buttons
6. Sleek surface throughout monitor's appearance
7. Smart cable management
8. Viewing angle adjustment up to 68°
9. Low power consumption only 6W with LED backlight
10. Support 1024x768 @60Hz

Specification


Model	P080VG / P080VR
Cabinet Color	Black or White
Cover Lens	Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93% (Model: P080VG) 5 wires resistive flat touch (Model: P080VR)
Display Type	8" diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 600 or 1024 x 768 @60Hz
Brightness	250 cd/m ² (typ.)
Contrast Ratio	500:1 (typ.)
Viewing Angle	125° (H) / 140° (V)
I/O Connectivity	D-Sub 15 pins (1.8 meters cable)
Backlight MTBF	20,000 hrs

* Specification is subject to be changed without prior notice.

Applications: Supermarket/Chain stores/Hospitality/
Factory automation



Dimension (unit: mm)

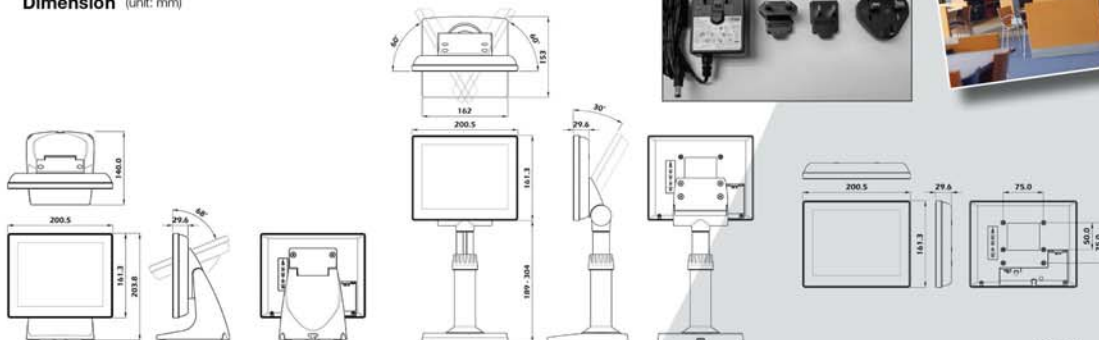

Universal power plug

